




4000 V DC
gRB-gRD from 200 to 560 A
Size 2 x 602

Dimensions

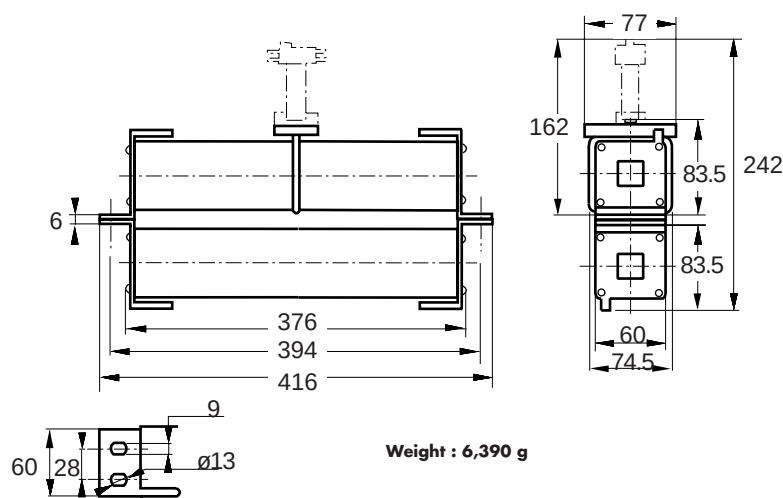


MAIN CHARACTERISTICS

Size	Current rating I_N (A)	Interrupting rating	Watt losses		Code	Part number	Pack.
			$0.8 I_N$	I_N			
2x602	200	@ 4000 V DC 30 kA L/R = 30 ms	109	200	CC 40 Bodk CV3 gRB 2x602 Q 200M	R 086955	1 piece
	250		138	254	CC 40 Bodk CV3 gRB 2x602 Q 250M	S 086956	
	315	@ 4000 V DC 30 kA L/R = 15 ms	126	231	CC 40 Bodk CV3 gRD 2x602 Q 315M	J 075770	
	400		153	282	CC 40 Bodk CV3 gRD 2x602 Q 400M	K 075771	
	500		190	348	CC 40 Bodk CV3 gRD 2x602 Q 500M	L 075772	
	560		216	396	CC 40 Bodk CV3 gRD 2x602 Q 560M	M 075773	

EDV adaptor for in factory assembled trip-indicator
MC 2R 3E 2.5 BS microswitch. Part # : S 077020

D.C application data

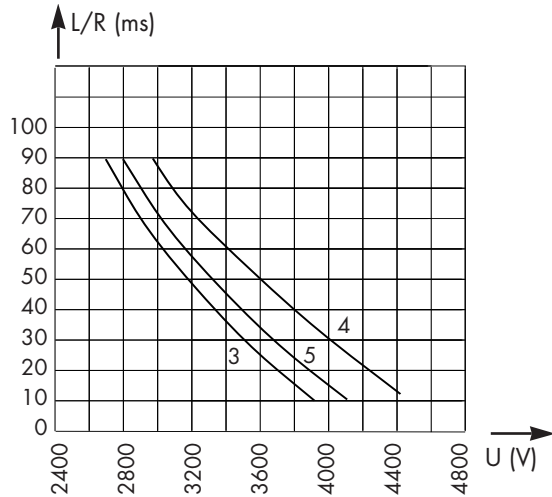


3 : 3500 V gRB
4 : 4000 V gRB
5 : 4000 V gRD

These curves indicate the maximum permissible value of time constant L/R as a function of the D.C. working voltage

Max. A.C. voltage (50/60 Hz):
3,600 V with interrupting rating of 30 kA


Peak arc voltage vs. working voltage

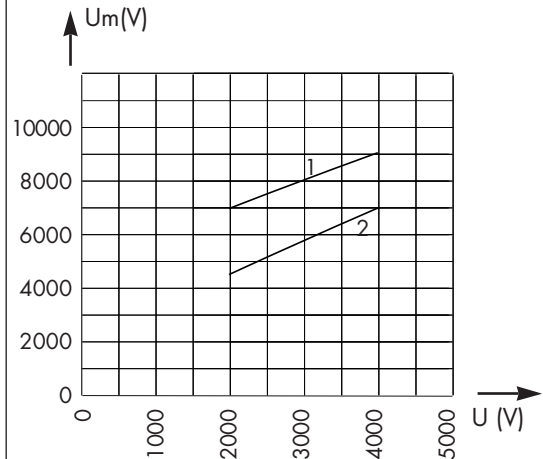


1 : L/R = 30 ms-3500-4000 V gRB
2 : L/R = 15 ms 4000 V gRD

These curves indicate for various time constants L/R the peak arc voltage, which may appear across the fuse terminals, vs. D.C. working voltage

Time vs. current characteristics

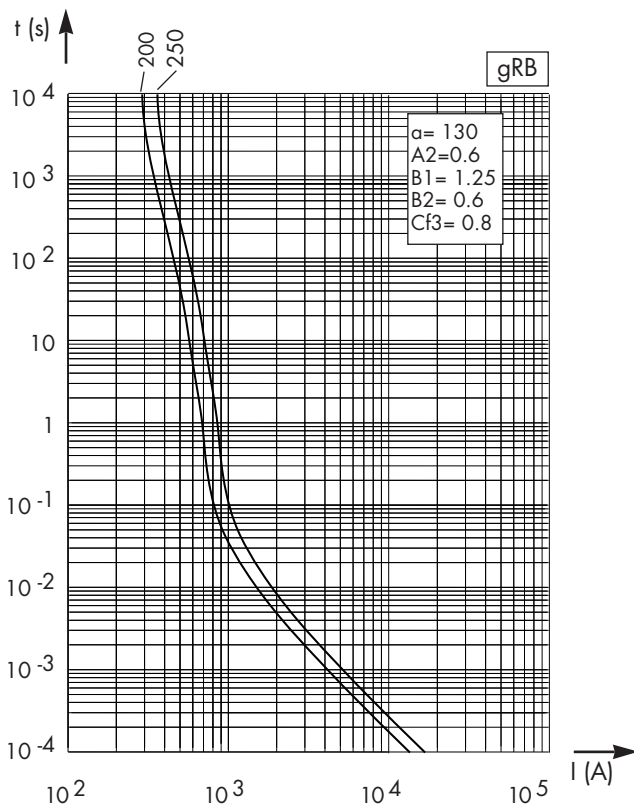

These curves indicate, for each rated current, the pre-arcing time vs. the R.M.S. pre-arcing current.

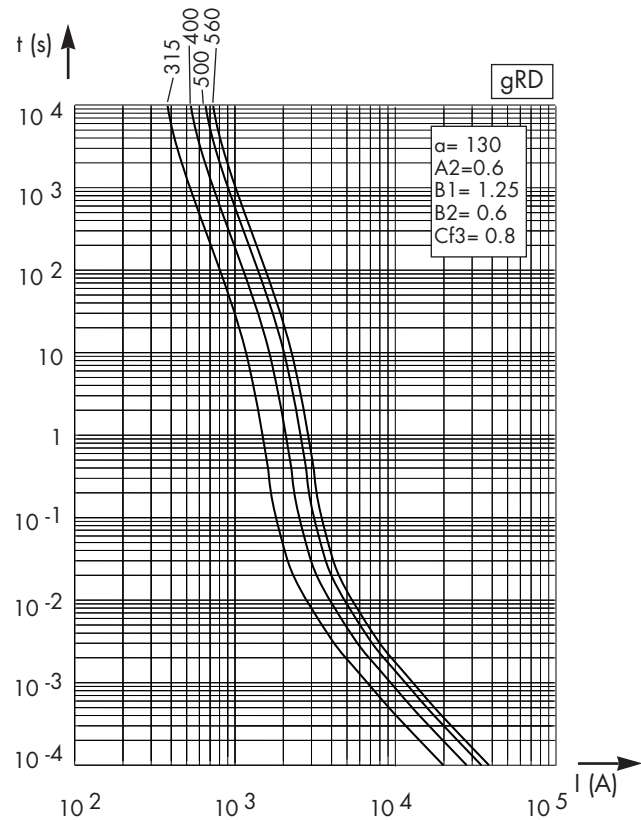

± 10% tolerance for the mean pre-arcing current

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

Publication: V600134-07/95
CP3P2 / 3P 32034 GB
RA 0034 A