




48 V DC
FBT aR from 40 to 500 A


Dimensions

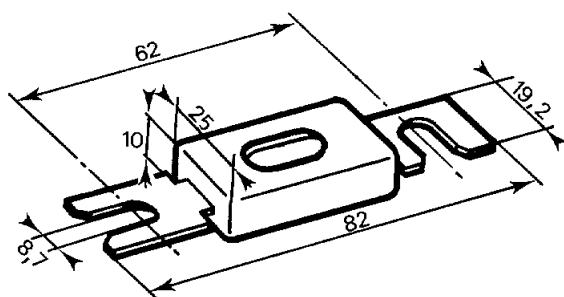

MAIN CHARACTERISTICS

Size	Current rating I_N (A)	Interrupting rating	Code	Part number	Packaging
2.1.4	40	@ 32 V : 5000 A L/R = 5 ms	CC 48 FBT aR 40	L 080855	10 pieces
	50	@ 48 V : 1500 A L/R = 5 ms	CC 48 FBT aR 50	K 080854	
	80		CC 48 FBT aR 80	J 080853	
	90	@ 32 V : 5000 A L/R = 5 ms	CC 48 FBT aR 90	H 080852	
	100	@ 48 V : 2000 A L/R = 5 ms	CC 48 FBT aR 100	G 080851	
	130	@ 32 V : 5000 A L/R = 5 ms	CC 48 FBT aR 130	A 080408	
	150	@ 48 V : 2500 A L/R = 5 ms	CC 48 FBT aR 150	F 080850	
	175		CC 48 FBT aR 175	E 080849	
	200	@ 32 V : 5000 A L/R = 5 ms @ 48 V : 3500 A L/R = 5 ms	CC 48 FBT aR 200	D 080848	
	225		CC 48 FBT aR 225	C 080847	
	250		CC 48 FBT aR 250	Z 080407	
	275		CC 48 FBT aR 275	B 080846	
	300		CC 48 FBT aR 300	Y 080406	
	325		CC 48 FBT aR 325	A 080845	
	350		CC 48 FBT aR 350	Z 080844	
	400		CC 48 FBT aR 400	Y 080843	
	500		CC 48 FBT aR 500	X 080842	

Time vs. current characteristics

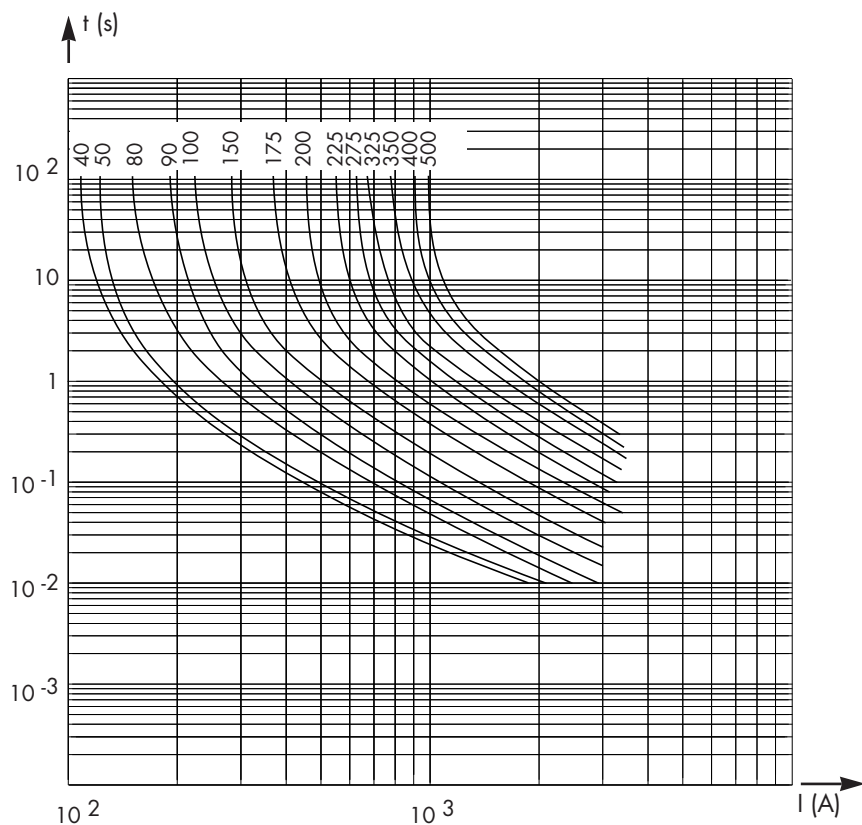


These curves indicate, for each rated current, the pre-arcing time vs. the R.M.S. pre-arcing current

No melting @ $1,5 I_N$

Melting time less than 1 seconde @ $5 I_N$

Melting time higher than 10 secondes @ $2 I_N$

Fuse-base

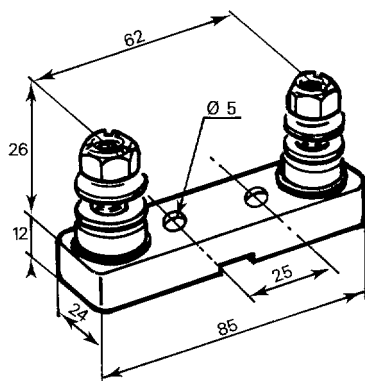

Code	Part number	Weight (g)	Packaging
S. FBT	A 092092	90	3 pieces

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

Publication: K600102-07/95
CP3P2 / 3P 32002 GB
RA 0002 A