



## LOW VOLTAGE FUSES





690 V  
aM from 25 to 800 A  
Sizes : 0 - 1 - 2 - 3 - 4



BLADE STYLE FUSES : WITH BLOWN FUSE TRIP-INDICATOR

COMPLYING WITH IEC 269.1 & 2, NF EN 60269.1,  
NF C 63210 - 63211 AND DIN 43620

### DIMENSIONS



SIZES : 0 - 1 - 2 - 3

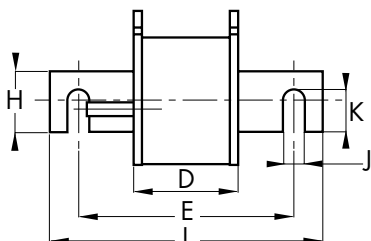

SIZE : 4




| Size | Ø   | C   | D  | E   | H  | J    | K  | L   | e | Wgt. (g) |
|------|-----|-----|----|-----|----|------|----|-----|---|----------|
| 0    | 40  | 55  | 73 |     | 15 |      |    | 125 | 6 | 230      |
| 1    | 52  | 65  | 79 |     | 22 |      |    | 135 | 6 | 385      |
| 2    | 60  | 73  | 79 |     | 27 |      |    | 150 | 6 | 585      |
| 3    | 75  | 88  | 79 |     | 32 |      |    | 150 | 6 | 840      |
| 4    | 104 | 123 | 90 | 150 | 52 | 15,5 | 32 | 200 | 8 | 2400     |

### MAIN CHARACTERISTICS


| Size | Voltage rating (V) | Current rating IN(A) | Watts losses | Code              | Part #   | Size | Voltage rating (V) | Current rating IN(A)         | Watts losses | Code               | Part #   |
|------|--------------------|----------------------|--------------|-------------------|----------|------|--------------------|------------------------------|--------------|--------------------|----------|
| 0    | 690 V              | 25                   | 1,5          | 6,9 PC5 aM 0 P 25 | G 083933 | 2    | 690 V              | 100                          | 6,5          | 6,9 PC5 aM 2 P 100 | D 080779 |
|      |                    | 32                   | 1,9          | " " 32            | H 083934 |      |                    | 125                          | 8,5          | " " 125            | W084705  |
|      |                    | 40                   | 2,8          | " " 40            | D 084712 |      |                    | 160                          | 12           | " " 160            | V 084704 |
|      |                    | 50                   | 3,5          | " " 50            | C 084711 |      |                    | 200                          | 14           | " " 200            | T 084703 |
|      |                    | 63                   | 4,4          | " " 63            | B 084710 |      |                    | 250                          | 16           | " " 250            | S 084702 |
|      |                    | 80                   | 5,6          | " " 80            | Z 085076 |      |                    | 315                          | 18,6         | " " 315            | C 085838 |
|      |                    | 100                  | 7            | " " 100           | E 085840 | 3    | 690 V              | 315                          | 27           | 6,9 PC5 aM 3 P 315 | F 083932 |
| 1    | 690 V              | 125                  | 8,75         | " " 125           | A 084709 |      |                    | 400                          | 31           | " " 400            | B 085837 |
|      |                    | 50                   | 2,9          | 6,9 PC5 aM 1 P 50 | B 080777 |      |                    | 500                          | 40           | " " 500            | L 079912 |
|      |                    | 63                   | 3,9          | " " 63            | X 079784 | 4    | 690 V              | 500                          | 38           | 6,9 PC2 aM 4 E 500 | X 084223 |
|      |                    | 80                   | 5            | " " 80            | Z 084708 |      |                    | 630                          | 50           | " " 630            | Y 084224 |
|      |                    | 100                  | 7            | " " 100           | Y 084707 |      |                    | 800                          | 65           | " " 800            | Z 084225 |
|      |                    | 125                  | 8,75         | " " 125           | Y 085075 |      |                    | Interrupting rating : 200 kA |              |                    |          |
|      |                    | 160                  | 12           | " " 160           | X 084706 |      |                    |                              |              |                    |          |
|      |                    | 200                  | 14           | " " 200           | D 085839 |      |                    |                              |              |                    |          |

Accessories : Pull-out handle - PMP Part # E 097708


## TOTAL CLEARING $I^2t$

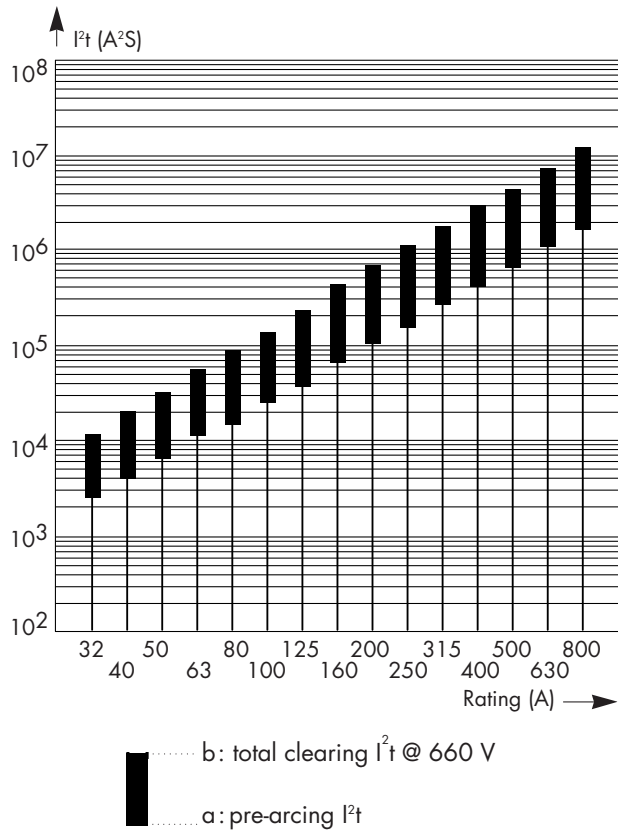

## CURRENT LIMITATION CURVES

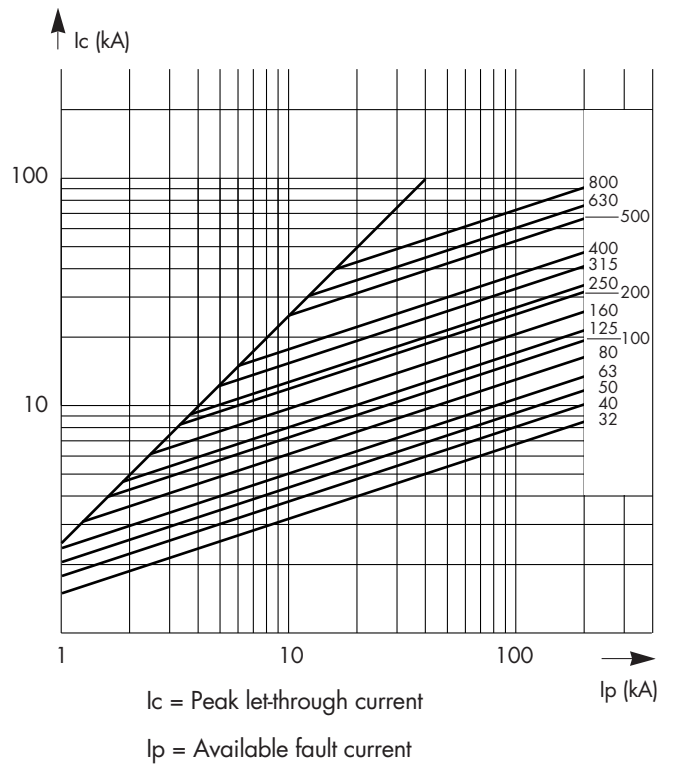

## TIME VS. CURRENT CHARACTERISTICS

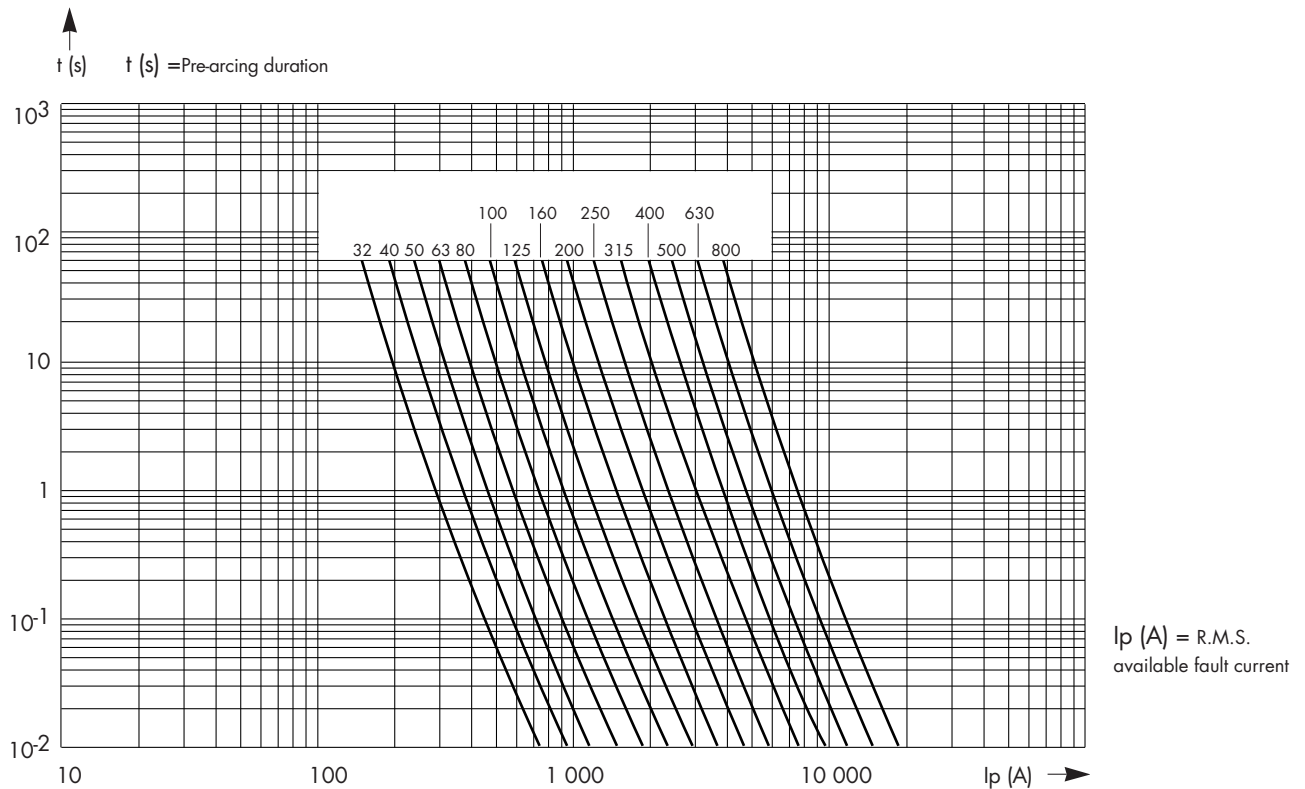

**FERRAZ**

28, rue Saint Philippe  
B.P. 3025 - 69391 Lyon Cedex 03-France  
Tél. (33) 72 22 66 11  
Fax. (33) 72 22 67 13

Rue de Vaucanson  
69720 Saint-Bonnet de Mure - France  
Tél. (33) 72 22 66 11  
Fax. (33) 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: **N600335-06/96**  
CP3B1 / 3B1 34067 GB  
RA 0154 A