


Switch-Over Luminaire BS 556105 AESLM/F

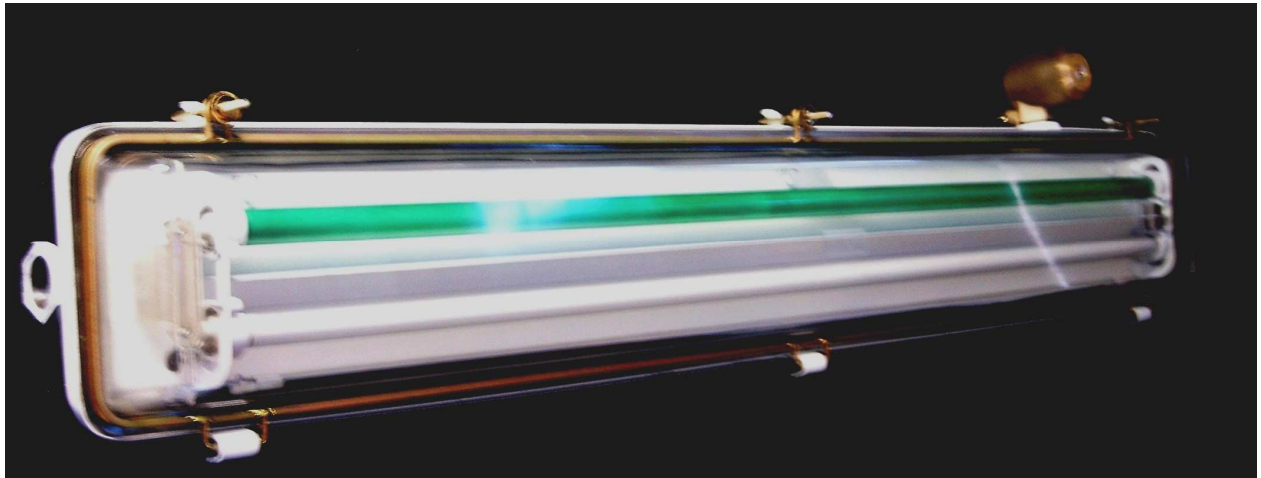

Type of Explosion Protection:

 I M2 EEx edq I

Degree of Enclosure Protection:

IP 66

EC-Type Examination Certificate:

IBExU 97 ATEX 1035

Use

The switch-over two-lamp luminaire type BS 552 AESLM/F can be integrated in the existing luminaire line.

By means of the factory-installed and pre-wired test switch (BS 59) the green lamp can be switched on or off.


If the green lamp is switched on „passenger traffic“ is „allowed“.
(The white lamp is giving light at the same time.)

If the green lamp is switched off „passenger traffic“ is „abandoned“.
(The green lamp is switched off, the white lamp is still giving light.)

In this type of switch-selected lighting illumination is provided, even if passenger traffic is abandoned.

Installation of additional luminaires is not necessary.

Technical Drawing BS 552 AESLM/F

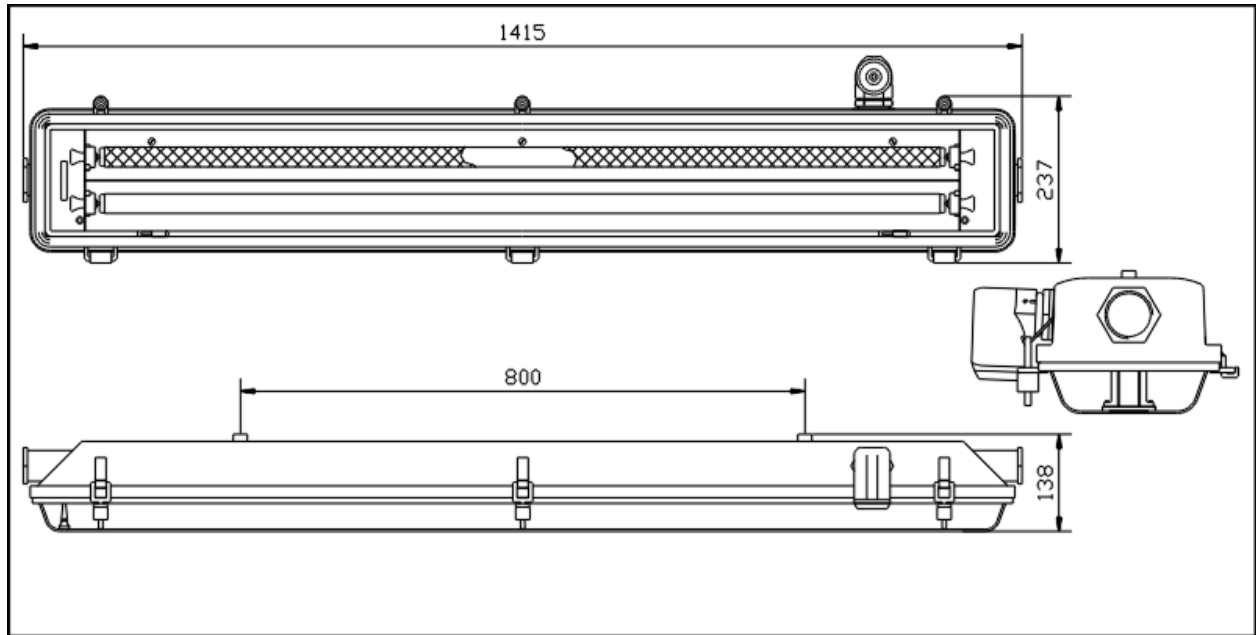

Technical Data

Dimensions and Weight

Dimensions (l x w x h) approx.: 1415 x 237 x 138 mm
 Weight approx.: 18 kg
 Threaded Sleeves: M 36 x 1.5

Elektrical Data

Wattage: 2 x 36 Watt
 Nominal Rating: 72 VA
 Working Voltage: 230 V (+10%/-4%)
 Nominal Current: 320 mA
 Luminous Flux: 2 x 3450 lm
 Frequency: 50/60 Hz
 Ballast: electronical
 Lamp Socket: G 13 (for two-pin fluorescent lamps)