



LOW VOLTAGE FUSES




500 V
aM from 125 to 630 A
Sizes : 2 - 3

BLADE STYLE FUSES : WITH BLOWN FUSE INDICATOR OR TRIP-INDICATOR

COMPLYING WITH IEC 269.1 AND 2.1, NF EN 60269.1 & 2 NF C 63210 - 63211 AND DIN 43620

DIMENSIONS

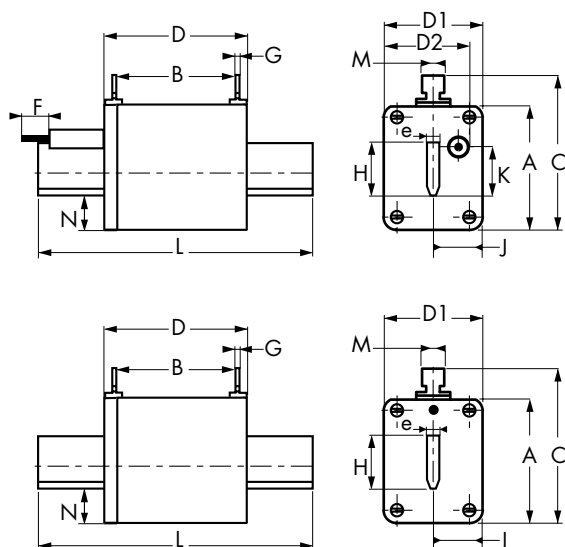

With trip-indicator

With blown fuse indicator



Size	A	B	C	D	D1	D2*	F*	G	H	J	K	L	M	N	e	Wgt.
2	60	64	72	74	50	50	14	3	28	19	14,5	150	10	14,5	6	590g
3	75	61	88	75	70	64	14	2,5	36	23	14,5	150	10	18	6	850g


* For fuses with trip-indicator

MAIN CHARACTERISTICS


Size	Voltage rating (V)	Current rating IN(A)	Watts losses	With blown fuse indicator		With trip-indicator	
				Code	Part #	Code	Part #
2	500 V	125	8,5	aM 2 /125	P 095210	aM 2 /125 P	Z 095196
		160	11,5	aM 2 /160	Q 095211	aM 2 /160 P	S 095213
		200	13,5	aM 2 /200	R 095212	aM 2 /200 P	F 095340
		250	17	aM 2 /250	Q 095142	aM 2 /250 P	H 095342
		315	24	aM 2 /315	R 095143	aM 2 /315 P	J 095343
		400	28	aM 2 /400	S 095144	aM 2 /400 P	K 095344
		500	34	aM 2 /500	W 088523	aM 2 /500 P	L 095345
3	500 V	315	24	aM 3 /315	J 095182	aM 3 /315 P	Q 095073
		400	28	aM 3 /400	D 095154	aM 3 /400 P	W 095354
		500	34	aM 3 /500	E 095155	aM 3 /500 P	X 095355
		630	41	aM 3 /630	F 095156	aM 3 /630 P	Y 095356

Accessories : Neutral link BS2 Part # J 097712 - BS3 Part # K 097713
Pull-out handle - PMP Part # E 097708


TOTAL CLEARING I^2t

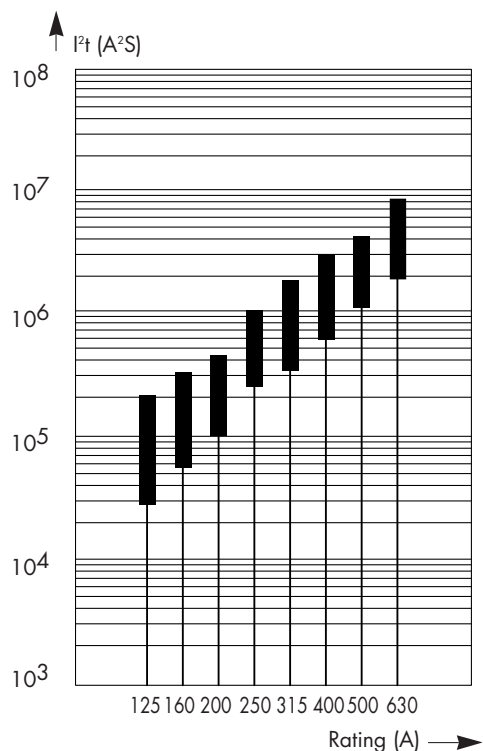

CURRENT LIMITATION CURVES

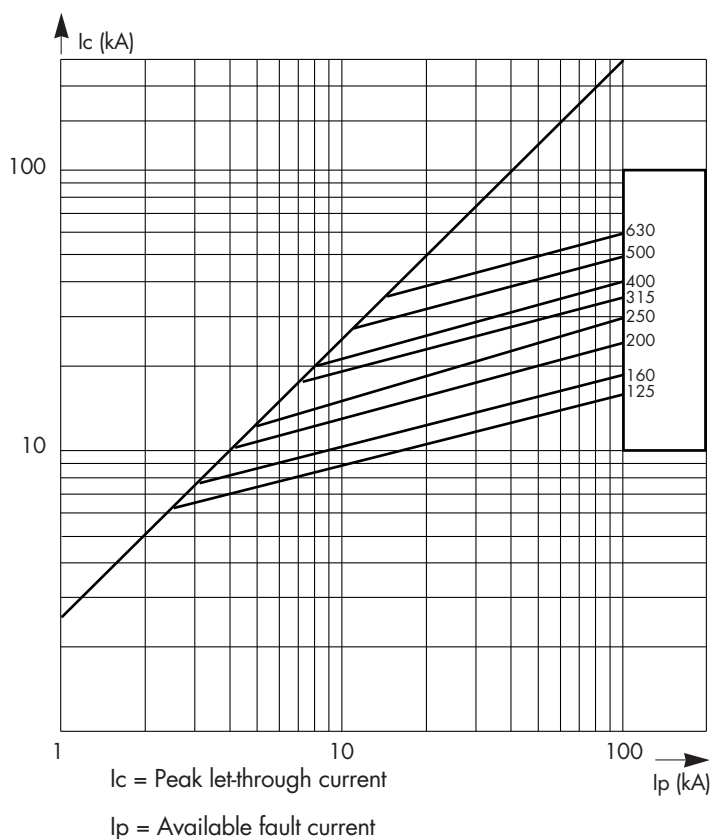

TIME VS. CURRENT CHARACTERISTICS

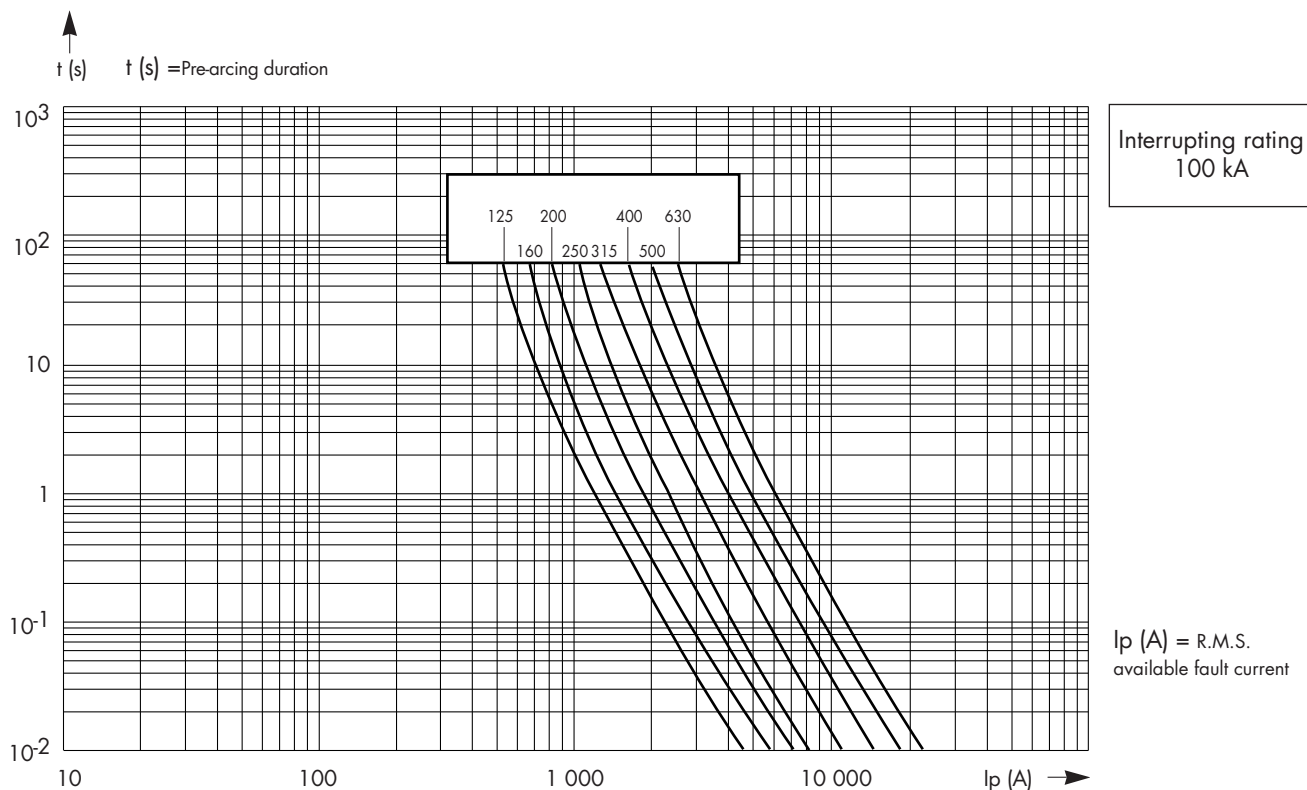

FERRAZ

28, rue Saint Philippe
 B.P. 3025 - 69391 Lyon Cedex 03-France
 Tél. 33 (0)4 72 22 66 11
 Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
 69720 Saint-Bonnet de Mure - France
 Tél. 33 (0)4 72 22 66 11
 Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: Z600299-03/97
 CP3B1 / 3B1 34064 GB
 RA 0151 B