



LOW VOLTAGE FUSES




250 V to 690 V
aM from 2 to 125 A
Sizes : 10x38, 14x51, 22x58

FERRULE STYLE FUSES WITH BLOWN FUSE TRIP-INDICATOR

COMPLYING WITH IEC 269.1 & 2, NF EN 60269.1
AND NF C 63210- 211 STANDARDS

DIMENSIONS

Trip-indicator force :
4,5 N @ 0 mm
2,5 N @ 7 mm

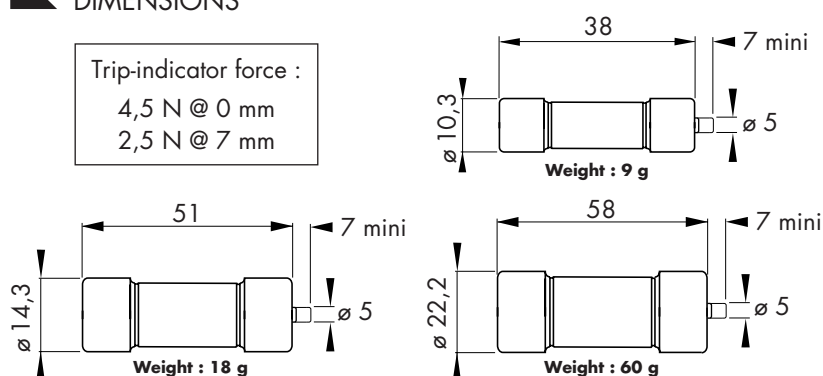


MAIN CHARACTERISTICS

Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	Code	Part #	Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	Code	Part #
10x38	400 V	2	0,2	4 21 CP aM 10- 2	Z 084984	22x58	690 V	2	0,25	6,9 21 CP aM 22- 2	Z 094690
		4	0,2	" 4	Y 085259			4	0,3	" 4	A 094691
		6	0,25	" 6	W085257			6	0,4	" 6	G 094674
		8	0,35	" 8	A 084985			8	0,5	" 8	C 094670
		10	0,36	" 10	B 084986			10	0,65	" 10	X 094688
		12	0,40	" 12	X 085258			12	0,80	" 12	D 094671
		16	0,60	4 21 CP aM 10-16	C 084757			16	1	" 16	C 094693
		20	0,80	" 20	V 085256			20	1,2	" 20	Y 094689
	250 V	25	1,1	2,5 21 CP aM 10-25	A 076038			25	1,4	" 25	E 094672
		32	1,5	" 32	B 076039			32	1,7	" 32	F 094673
14x51	500 V	2	0,30	5 21 CP aM 14- 2	Q 094452	22x58	690 V	40	2,2	" 40	B 094692
		4	0,28	" 4	S 094454			50	3	" 50	D 094694
		6	0,35	" 6	V 094456			50	3	" 50	D 094694
		8	0,40	" 8	X 094458			50	3	" 50	D 094694
		10	0,50	" 10	Z 094460			50	3	" 50	D 094694
		12	0,65	" 12	B 094462			50	3	" 50	D 094694
		16	0,90	" 16	F 094466			50	3	" 50	D 094694
		20	1,1	" 20	K 094470			50	3	" 50	D 094694
		25	1,3	" 25	Q 094475			50	3	" 50	D 094694
		32	1,75	" 32	Y 094482			50	3	" 50	D 094694
		40	2,25	" 40	G 094490			50	3	" 50	D 094694
	400 V	50	3,0	4 21 CP aM 14-50	S 094500		500 V	63	3,8	5 21 CP aM 22-63	M 094863
								80	4,8	" 80	F 094880
	400 V	50	3,0	4 21 CP aM 14-50	S 094500		400 V	100	6	" 100	H 094882
								125	8	4 21 CP aM 22-125	K 094884



Interrupting rating :
10 x 38 : 100 kA
14 x 51 : 140 kA
22 x 58 : 140 kA

Minimum operating voltage for the trip-indicator : 20 V


TOTAL CLEARING I^2t

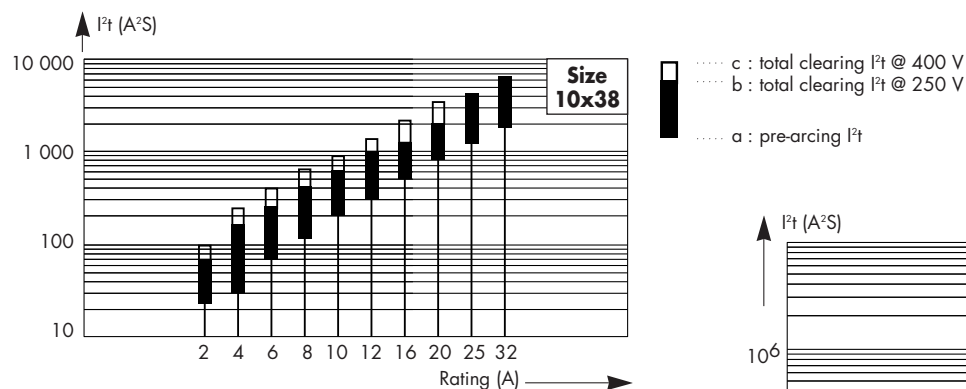

CURRENT LIMITATION CURVES

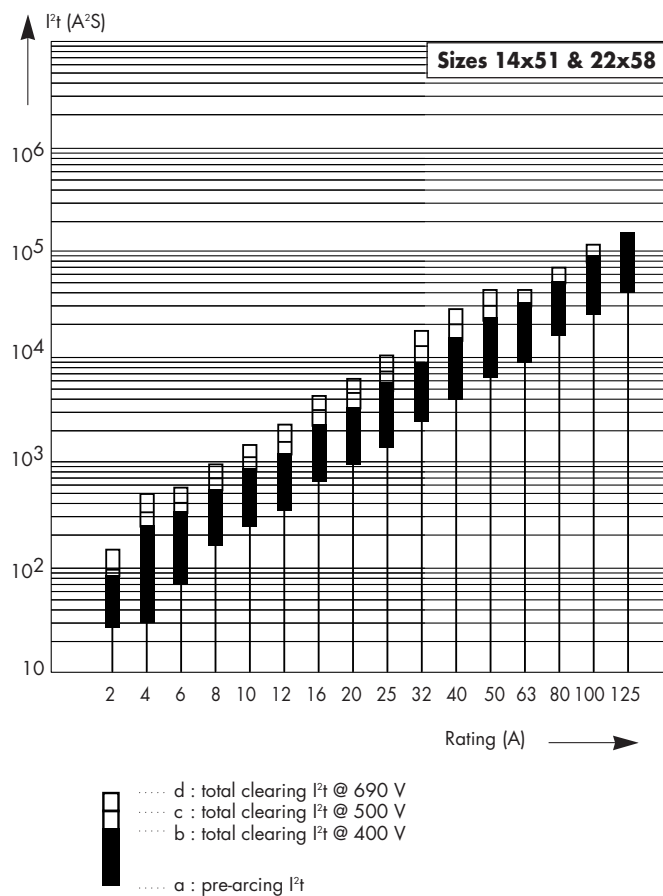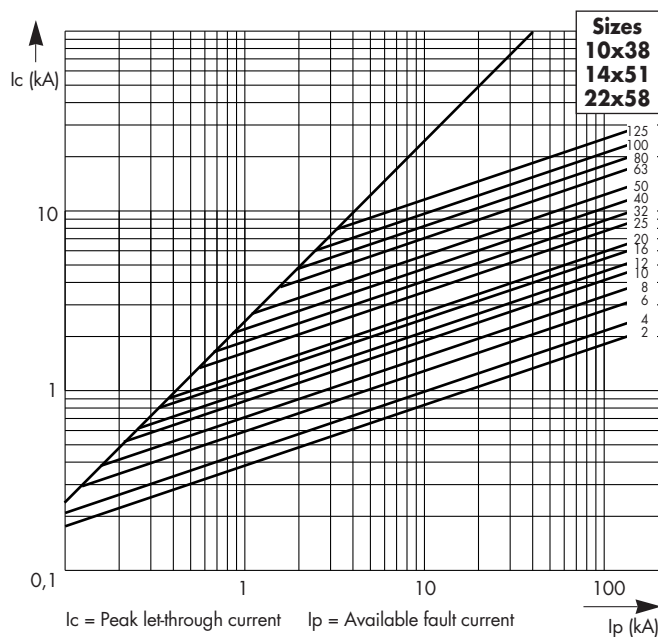

TIME VS. CURRENT CHARACTERISTICS

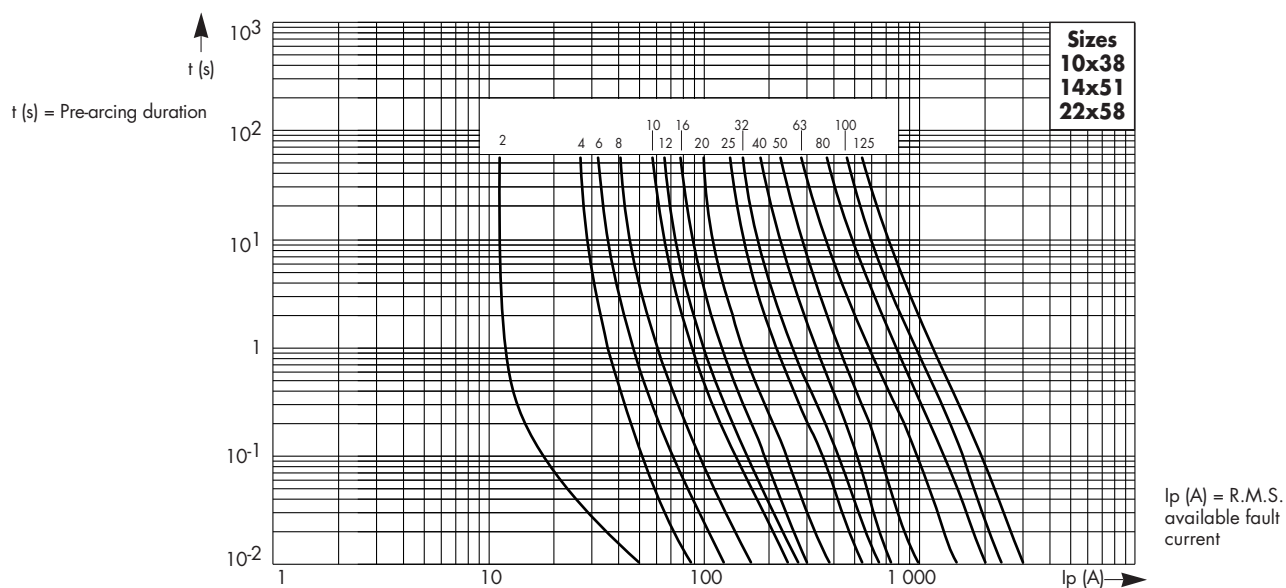

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. (33) 72 22 66 11
Fax. (33) 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. (33) 72 22 66 11
Fax. (33) 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: B600209-06/96
CP3B1 / 3B1 34053 GB
RA 0140 A