



LOW VOLTAGE FUSES





400 and 500 V
aM from 630 to 1250 A
Size : 4



BLADE STYLE FUSES : WITH BLOWN FUSE INDICATOR OR TRIP-INDICATOR

COMPLYING WITH IEC 269.1 AND 2.1, NF EN 60269.1 & 2 NF C 63210 - 63211 AND DIN 43620

DIMENSIONS



With trip-indicator



With blown fuse indicator




Size	A	B	C	D	D1	D2*	F*	G	H	J	K	L	M	N	e	Wgt.
4	107	61	119	78	90	77	14	2,5	60	27	14,5	200	10	23	8	1900g

* For fuses with trip-indicator

MAIN CHARACTERISTICS

Size	Voltage rating (V)	Current rating IN(A)	Watts losses	With blown fuse indicator		With trip-indicator	
				Code	Part #	Code	Part #
4	500 V	630	41	aM 4 / 630	X 098322	aM 4 / 630 P	M 088515
		800	49	aM 4 / 800	A 098325	aM 4 / 800 P	N 088516
		1000	70	aM 4 /1000	B 098326	aM 4 /1000 P	P 088517
	400 V	1250	75	aM 4 /1250	C 098327	aM 4 /1250 P	Q 088518

Accessories : Neutral link - BS4 Part # M 097715
Pull-out handle - PMP Part # E 097708

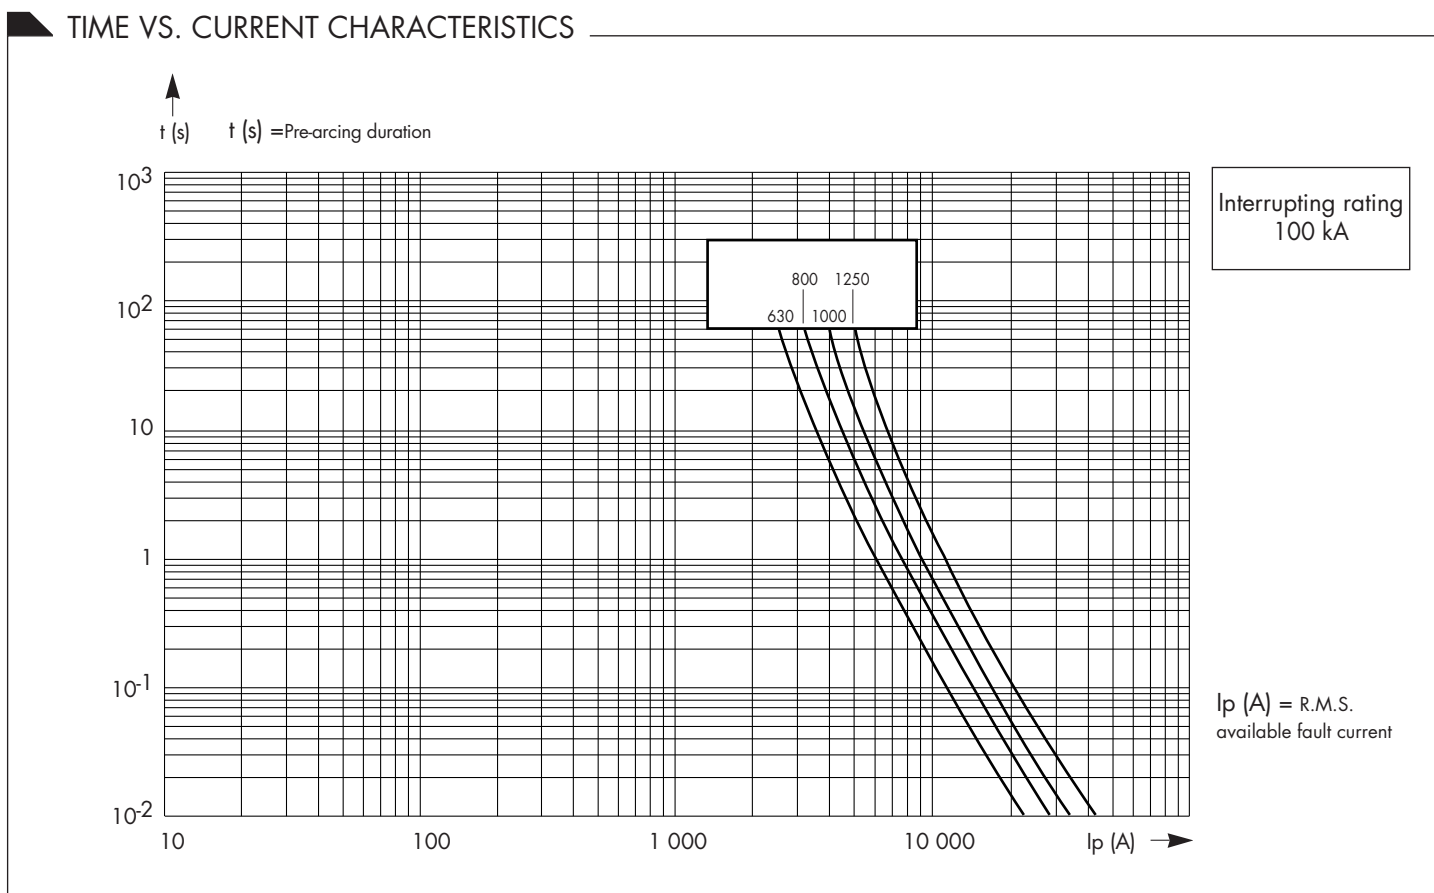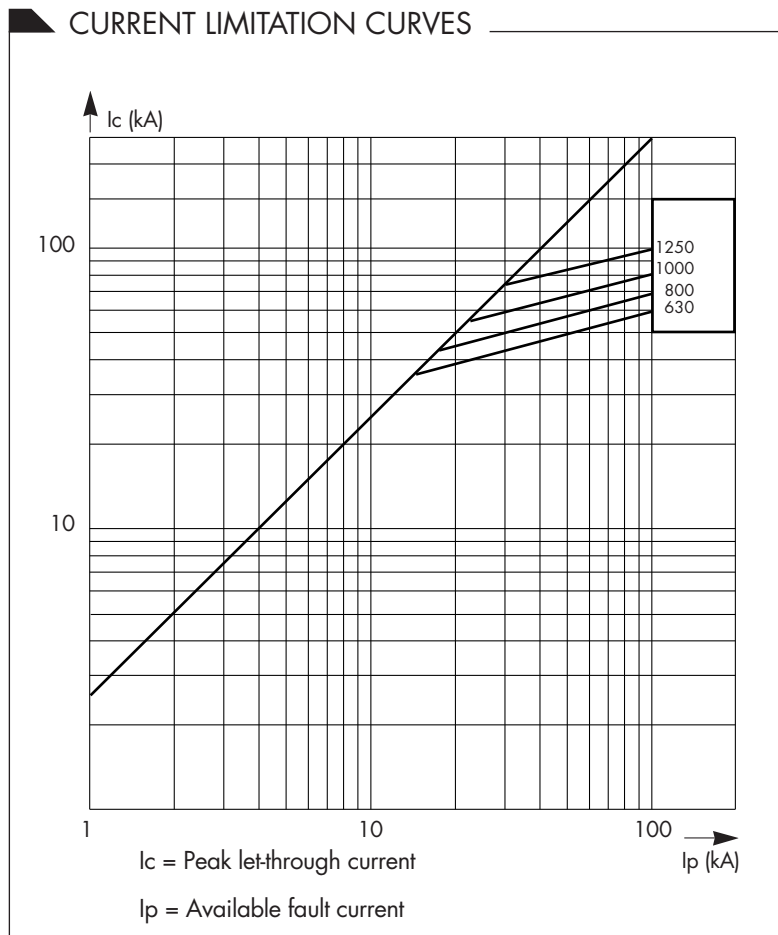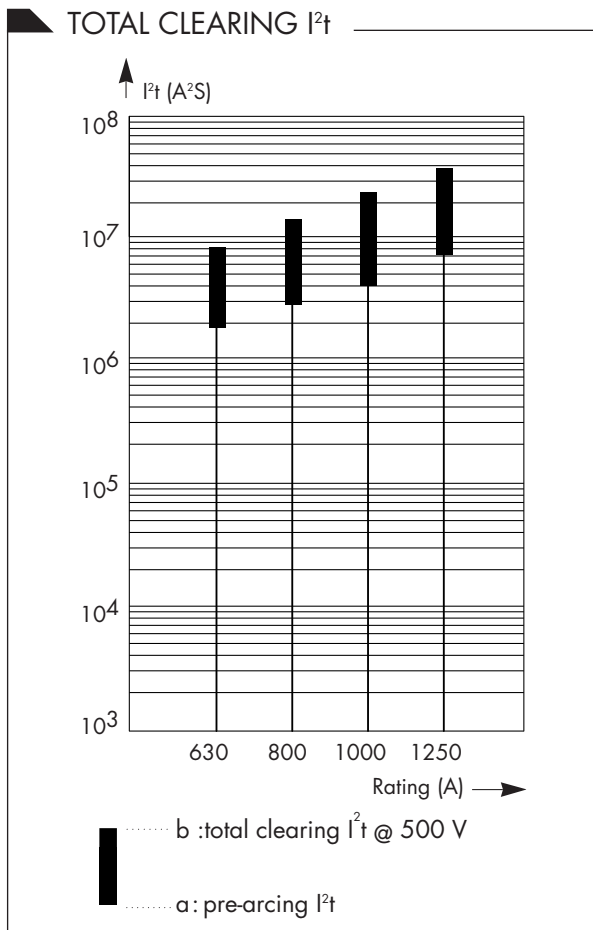

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: G600329-03/97
CP3B1 / 3B1 34065 GB
RA 0152 B