



LOW VOLTAGE FUSES




690 V
gG from 25 to 800 A
Sizes : 0 - 1 - 2 - 3 - 4

BLADE STYLE FUSES : WITH BLOWN FUSE TRIP-INDICATOR

COMPLYING WITH IEC 269.1 & 2, NF EN 60269.1,
NF C 63210 - 63211 AND DIN 43620

DIMENSIONS

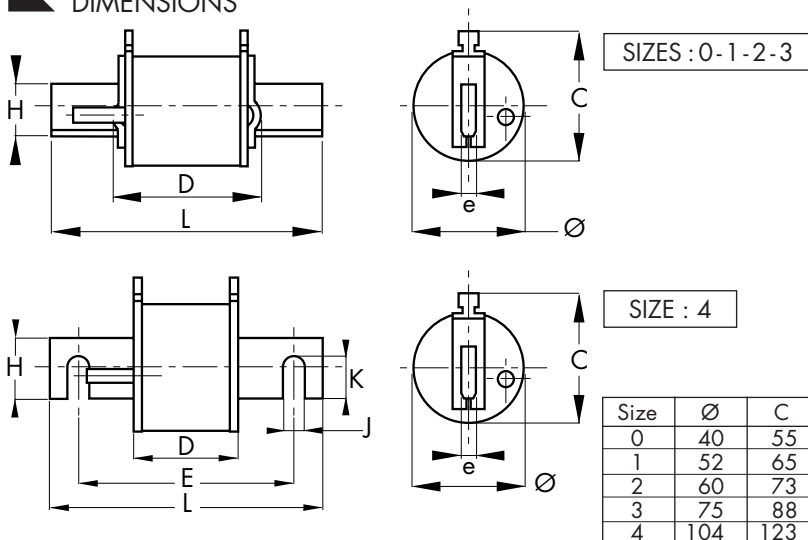

Size	Ø	C	D	E	H	J	K	L	e	Wgt. (g)
0	40	55	73		15			125	6	230
1	52	65	79		22			135	6	385
2	60	73	79		27			150	6	585
3	75	88	79		32			150	6	840
4	104	123	90	150	52	15,5	32	200	8	2400


MAIN CHARACTERISTICS

Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	Code	Part #	Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	Code	Part #
0	690 V	25	2.0	6,9 PC5 gG 0 P 25	X 083947	2	690 V	80	7.2	6,9 PC5 gG 2 P 80	A 084870
		32	2.6	" " 32	W083946			100	9	" " 100	Z 084869
		40	3.5	" " 40	R 084701			125	13	" " 125	Y 084868
		50	4.3	" " 50	Q 084700			160	17	" " 160	X 084867
		63	5.7	" " 63	P 084699			200	21	" " 200	F 086485
		80	7.5	" " 80	N 084698			250	26.5	" " 250	G 086486
		100	9	" " 100	M 084697			315	32	" " 315	H 086487
		125	11	" " 125	L 084696						
1	690 V	50	4	6,9 PC5 gG 1 P 50	E 080780	3	690 V	315	30	6,9 PC5 gG 3 P 315	R 083942
		63	5	" " 63	M 081040			400	42	" " 400	E 084690
		80	7.4	" " 80	K 084695			500	48	" " 500	M 080879
		100	9.5	" " 100	J 084694	4	690 V	500	40	6,9 PC2 gG 4 E 500	R 084218
		125	11.5	" " 125	H 084693			630	57	" " 630	S 084219
		160	15	" " 160	G 084692			800	73	" " 800	T 084220
		200	18.5	" " 200	F 084691			Interrupting rating : 200 kA			


Accessories : Pull-out handle - PMP Part # E 097708

ELECTRICAL CHARACTERISTICS


TOTAL CLEARING I^2t

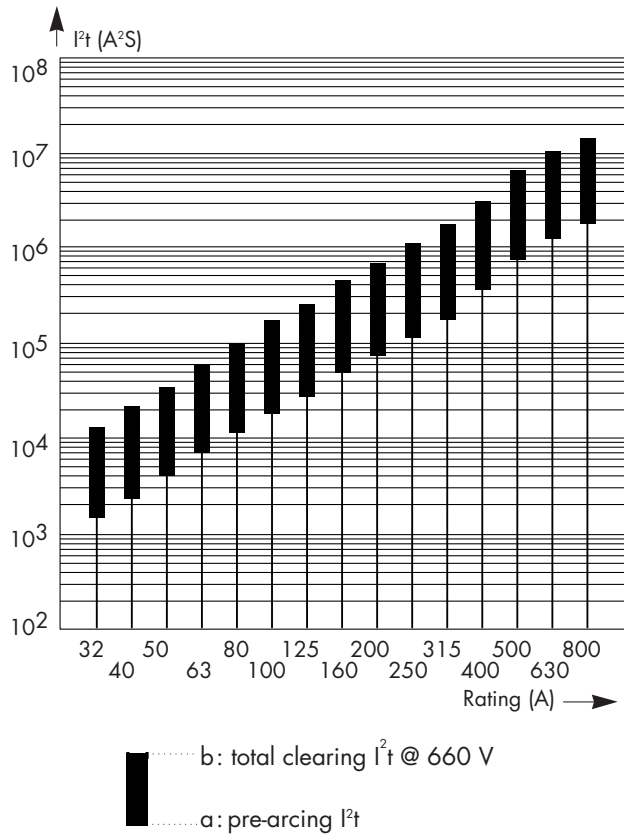

CURRENT LIMITATION CURVES

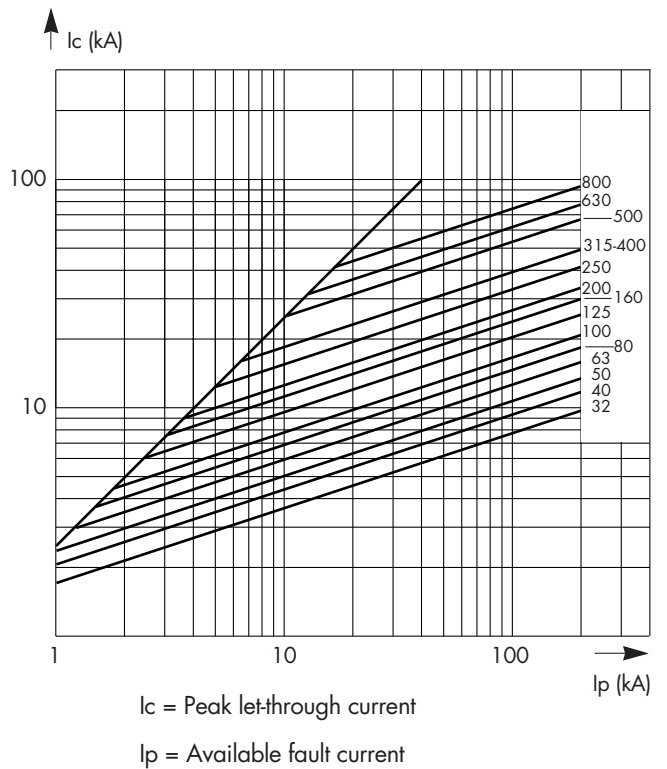

TIME VS. CURRENT CHARACTERISTICS

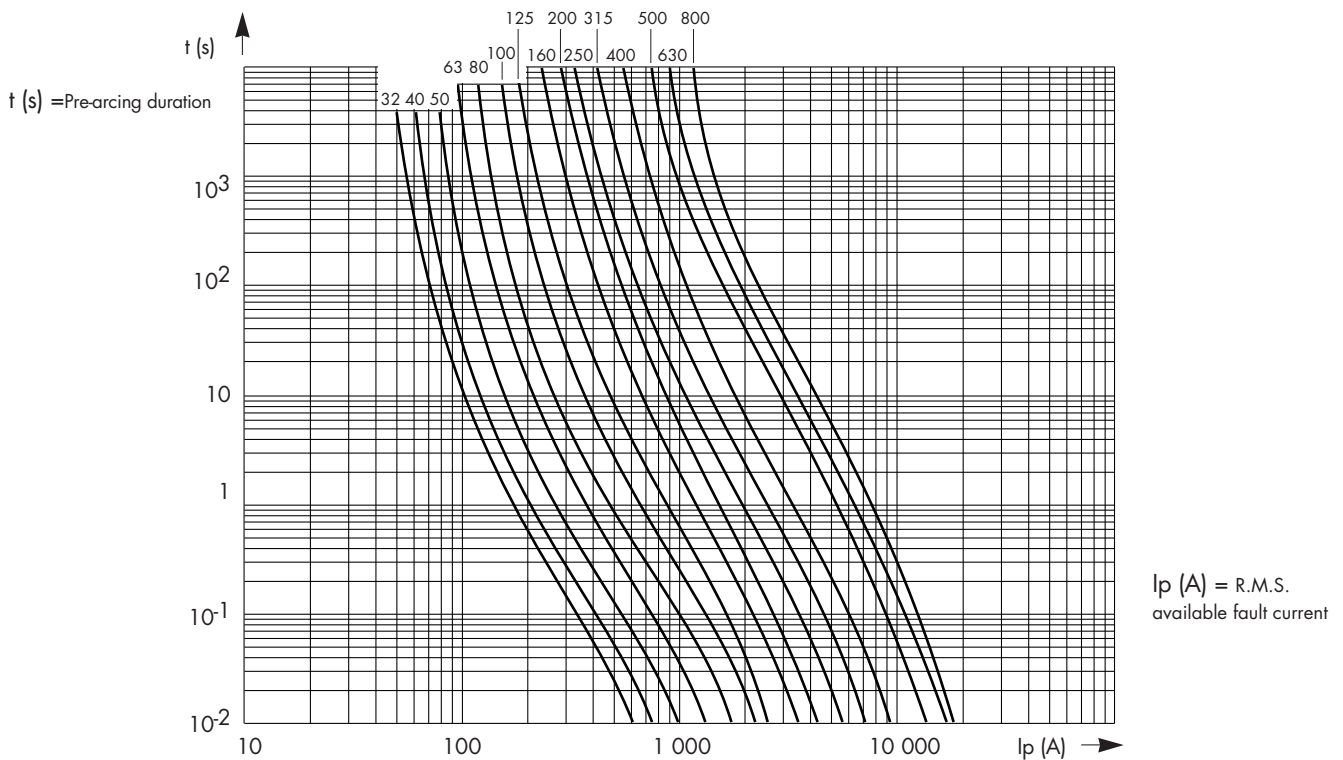

FERRAZ

28, rue Saint Philippe
 B.P. 3025 - 69391 Lyon Cedex 03-France
 Tél. (33) 72 22 66 11
 Fax. (33) 72 22 67 13

Rue de Vaucanson
 69720 Saint-Bonnet de Mure - France
 Tél. (33) 72 22 66 11
 Fax. (33) 72 22 66 12

Publication: M600334-06/96
 CP3B1 / 3B1 34066 GB
 RA 0153 A

N° Identification CEE : FR 429 555 11 217