



CLIPS FOR FERRULE STYLE FUSES ø 10 - 14 - 22 - 27 - 36

■ SILVER PLATED COPPER CLIPS :
EXTREMELY HIGH THERMAL AND ELECTRIC CONDUCTIVITY

■ STYLE OF MOUNTING :

- SCREWING ON ISOLATORS
- SCREWING ON BARS OR INSULATED BARS
- WELDING ON P.C.B. (MR 10 CI)

■ STAINLESS STEEL PRESSURE SPRINGS:


- SALT SPRAY-HIGHLY PROOF




MAIN CHARACTERISTICS

Code	Current rating I_N (A)	Maximum R.M.S continuous current through I_N - rated current fuses (A)	Advised copper cable section (mm ²)
MR 10	32	32	4
MR 10 CI	32	32	4
MR 14	63	63	10
MR 20	125	125	35
MR 22	135	135	35
MR 27	250	250	120
MR 36	250	250	120


MR 10 - MR 10 CI



Code	Part #	Weight (g)	Packaging
MR 10	B 098004	6	20 pieces




Code	Part #	Weight (g)	Packaging
MR 10 without connection	C 098994	4	20 pieces

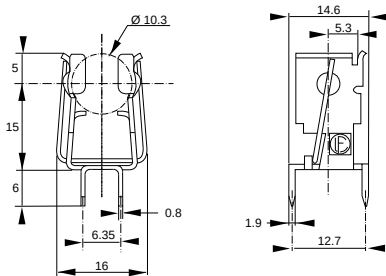


Code	Part #	Weight (g)	Packaging
MR 10 CI	Y 098507	4	200 pieces

MR 14

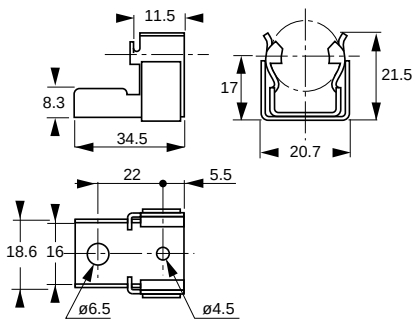


Code	Part #	Weight (g)	Packaging
MR 14	G 098170	5	10 pieces

MR 20.6

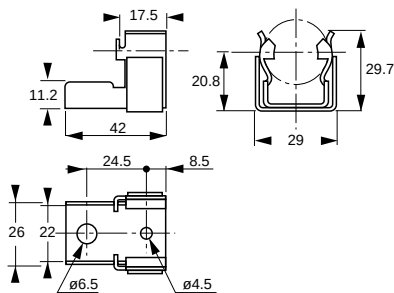


Code	Part #	Weight (g)	Packaging
MR 20.6	H 099988	27	20 pieces

MR 22

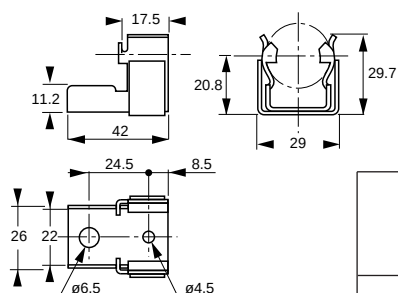


Code	Part #	Weight (g)	Packaging
MR 22	K 098909	40	10 pieces

MR 27

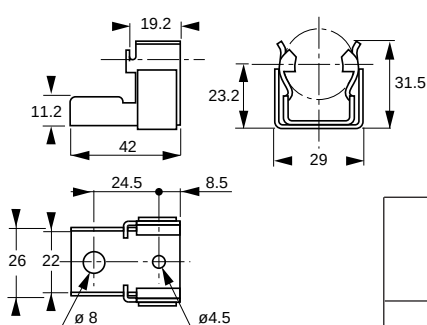

Code	Part #	Weight (g)	Packaging
MR 27	Y 092734	36	20 pieces

MR 36

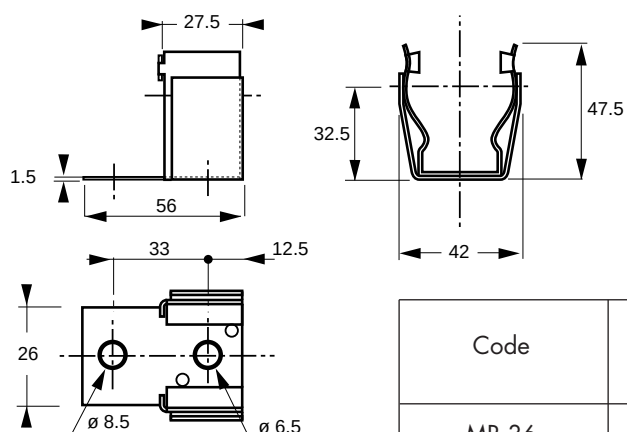


Code	Part #	Weight (g)	Packaging
MR 36	M 091275	75	1 piece


All these clips are silver-plated copper made and associated springs are stainless steel made.

For all the clips introduced in this document, mounting advices are indicated on page 4.

P.C.B. DRILLING FOR MR 10 CI CLIP (10 X 38 SIZE FUSE)

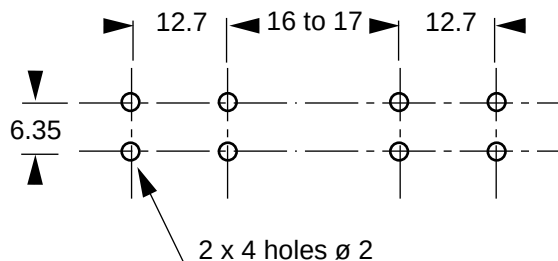


CLIPS MOUNTING

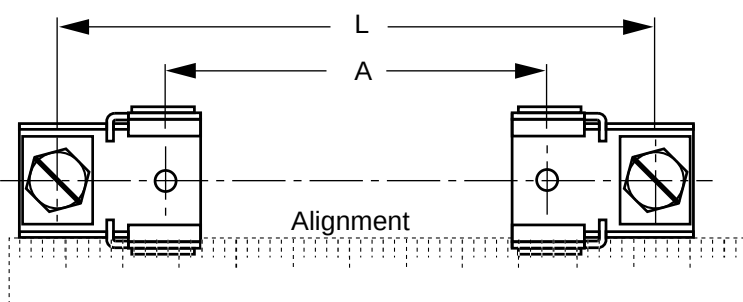

Fuse size	A	L
10 x 38	31	61
14 x 51	42	86
22 x 58	42	91
20 x 51	36	85
20 x 127	113	162
20 x 190	175	224
27 x 60	41	91
36 x 127	100	148
36 x 190	165	231

Mounting of two elastic stop pins of dia. 2 mm
for fixing the clips in position

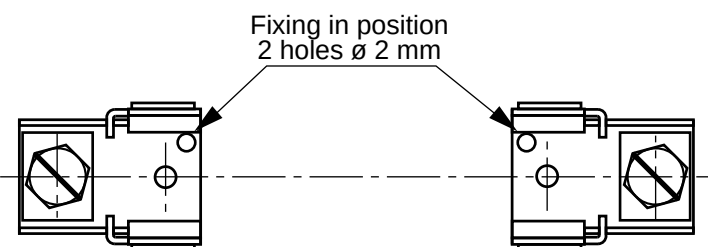

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. (33) 72 22 66 11
Fax. (33) 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. (33) 72 22 66 11
Fax. (33) 72 22 66 12

Publication: N600312-01/96
CP3B2 / 3B2 **34005 GB**
RA 0111 A