




CLASS L - FAST ACTING
600 VAC
200 000 A I.R.
601 to 6000 A

Current Limiting
Fast Acting

U.L. Listed
CSA Certified





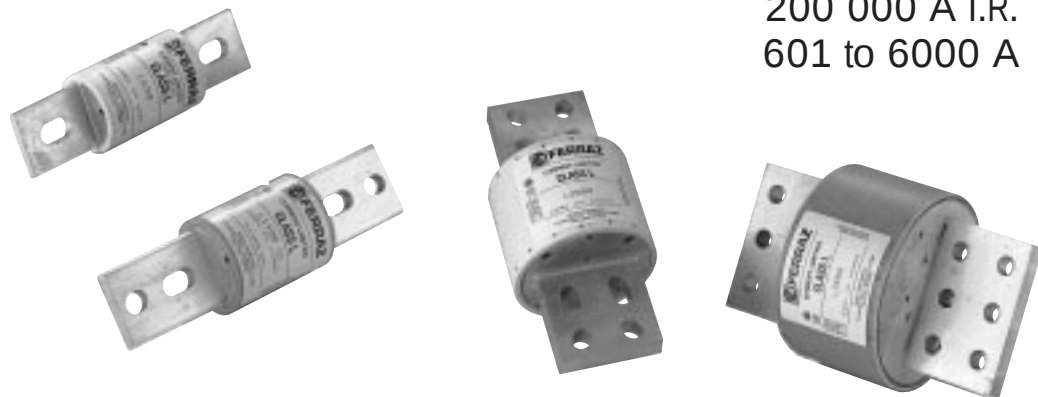


The Class L - Fast Acting Fuses are commonly used in the protection of switchboard mains, entrance and distribution equipment, feeders, and motor control centers, with the essential characteristics of the Class L design:

-highly current limiting,

- 200,000A Interrupting Rating,

and provide fast acting protection to equipment with low tolerance to overload and current surges, such as variable drives and rectifiers.

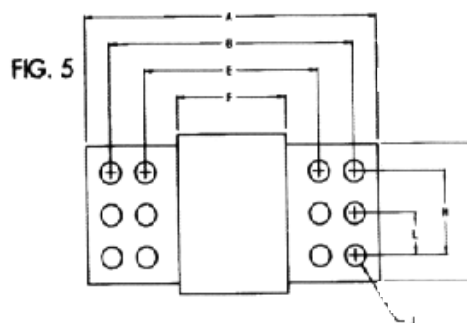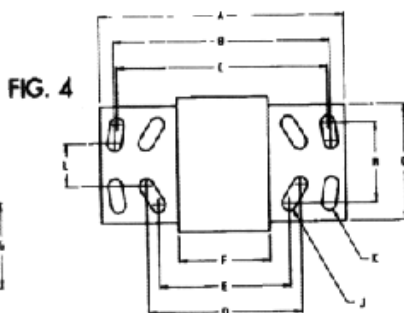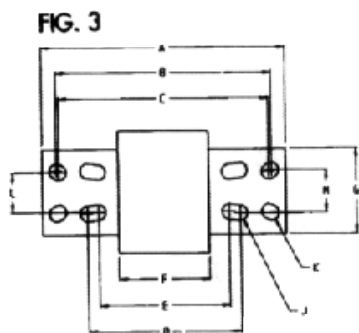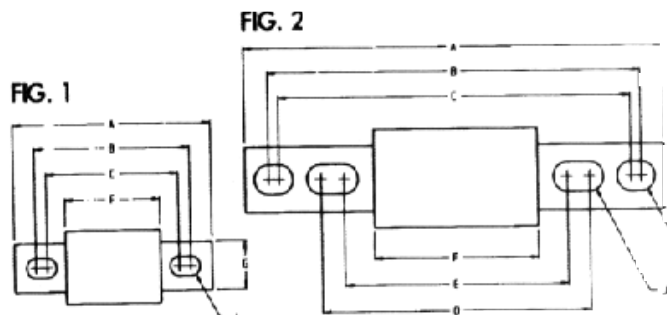

Dimensions


AMPERES	FIG.	A	B	C	D	E	F	G	H	I	J	K	L	M
601 TO 800	1	8.62	6.75	5.75			3.75	2	2.50	.38	.625X1.125			
1000 TO 1200	2	10.75	9.50	9.25	6.75	5.75	3.75	2.00	2.72	.38	.625X1.125	.625X.750		
1400 TO 1600	2	10.75	9.50	9.25	6.75	5.75	3.75	2.37	3.00	.44	.625X1.125	.625X.750		
1800 TO 2000	2	10.75	9.50	9.25	6.75	5.75	3.75	2.75	3.50	.50	.625X1.125	.625X.750		
2600	3	10.75	9.50	9.25	6.75	5.75	4.00	3.50	4.98	.75	.625X1.125	.625X.765	1.63	1.75
3000	3	10.75	9.50	9.25	6.75	5.75	4.00	4.00	4.98	.75	.625X1.125	.625X.765	1.63	1.75
3600 TO 4000	4	10.75	9.50	9.25	6.75	5.75	4.00	4.75	5.50	.75	.625X1.526	.625X1.385	1.75	3.25
4600 TO 5000	5	10.75					4.00	5.25	6.94	1.00	.625		1.63	3.25
6000	5	10.75					4.00	5.75	6.94	1.00	.625		1.63	3.25

Electrical Characteristics


Standard Ratings

AMP RATING		AMP RATING	
601	L601	1600	L1600
650	L650	1800	L1800
700	L700	2000	L2000
800	L800	2500	L2500
900	L900	3000	L3000
1000	L1000	3500	L3500
1200	L1200	4000	L4000
1350	L1350	4500	L4500
1400	L1400	5000	L5000
1500	L1500	6000	L6000


Time/Current Characteristics

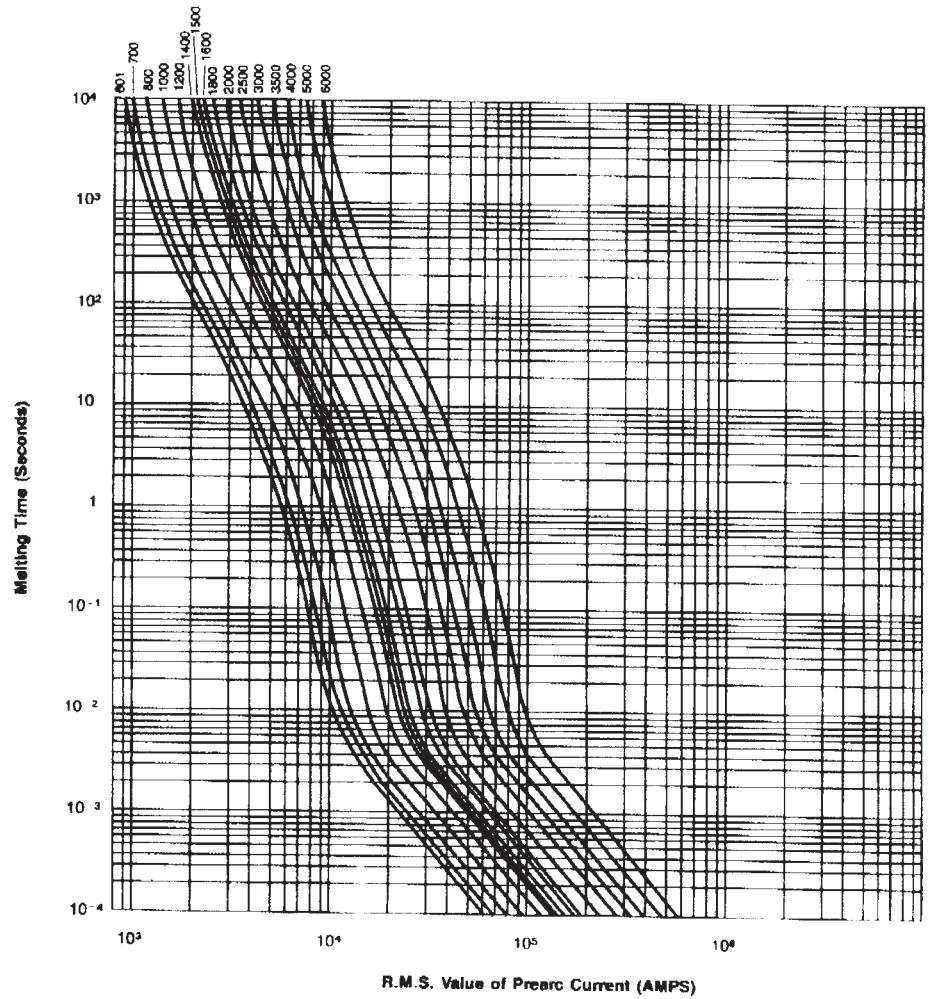


Maximum Values of Total Clearing I^2t

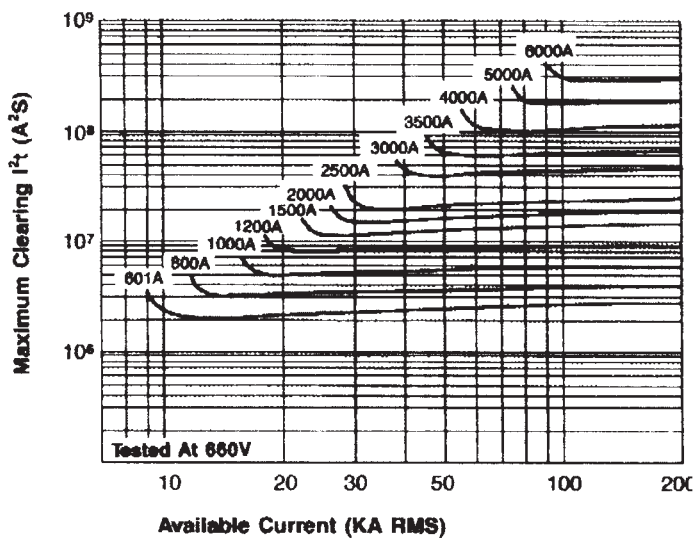

Arc Voltage

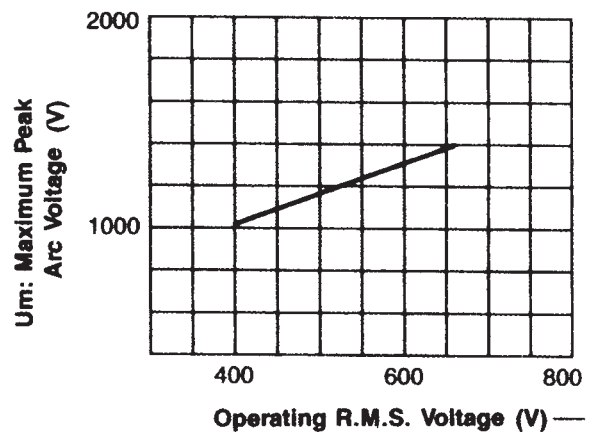

Electrical Characteristics

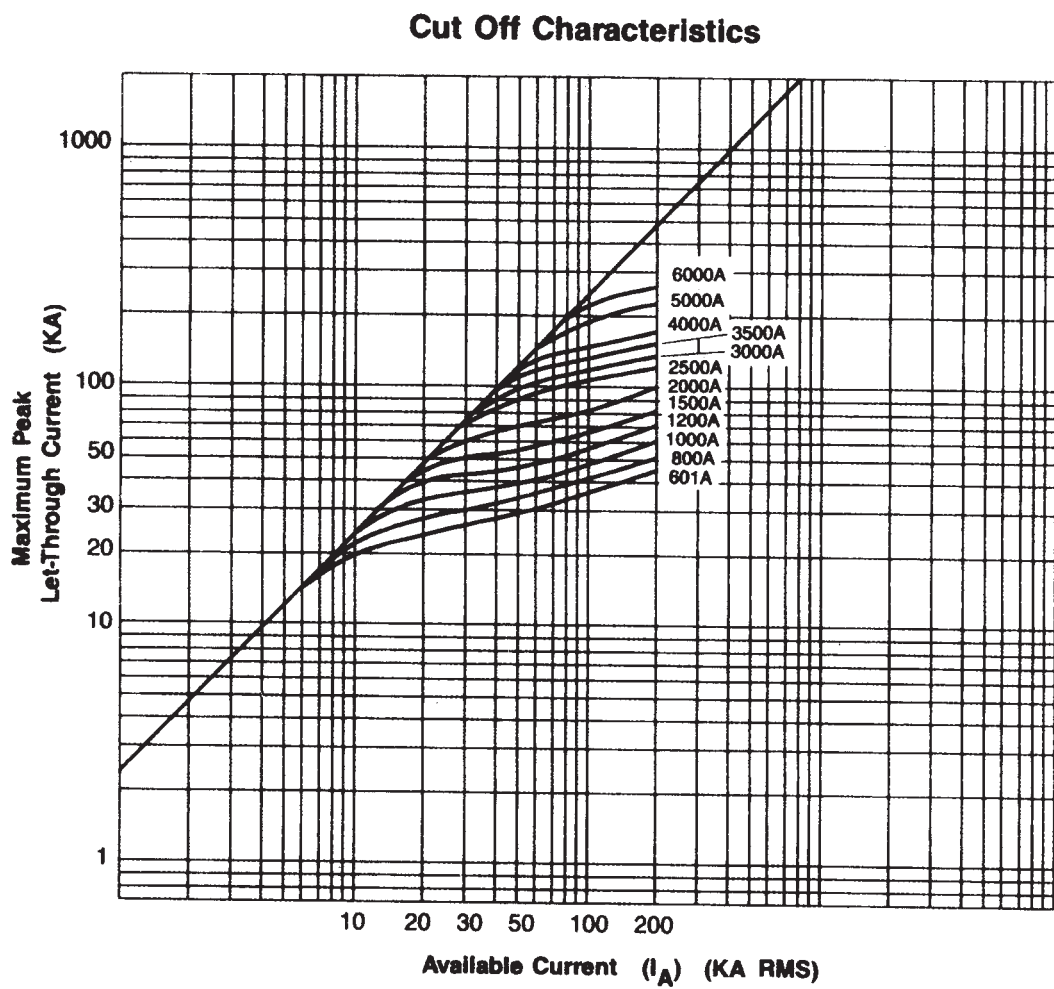

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

Publication : Q600475-05/95
RA 0317 A

N° Identification CEE : FR 429 555 11 217