



LOW VOLTAGE FUSES




500 V
gG from 40 to 250 A
Sizes : 0 - 1


BLADE STYLE FUSES : WITH BLOWN FUSE INDICATOR OR TRIP-INDICATOR

COMPLYING WITH IEC 269.1 AND 2.1 NF EN 60269.1
& 2 NF C 63210 - 63211 AND DIN 43620

DIMENSIONS

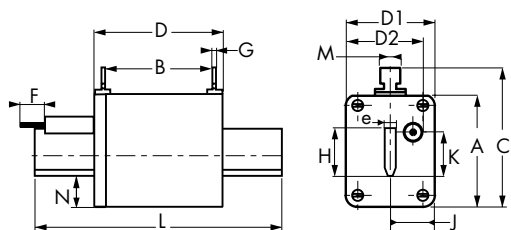

With trip-indicator

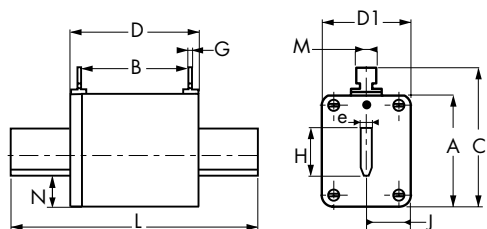

With blown fuse
indicator



Size	A	B	C	D	D1	D2*	F*	G	H	J	K	L	M	N	e	Wgt.
0	46	62	59	67	36	39	14	2,5	15	14,5	14,5	125	10	14,5	6	230g
1	52	64	64	74	47	47	14	3	21	16	14,5	135	10	14,5	6	400g


* For fuses with trip-indicator

MAIN CHARACTERISTICS


Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	With blown fuse indicator		With trip-indicator	
				Code	Part #	Code	Part #
0	500 V	40	4.2	gG 0 / 40	A 095013	gG 0 / 40 P	T 095214
		50	5.5	gG 0 / 50	B 095014	gG 0 / 50 P	V 095215
		63	6.5	gG 0 / 63	C 095015	gG 0 / 63 P	W 095216
		80	8.5	gG 0 / 80	D 095016	gG 0 / 80 P	Y 095218
		100	9.5	gG 0 / 100	E 095017	gG 0 / 100 P	A 095220
		125	12	gG 0 / 125	F 095018	gG 0 / 125 P	C 095222
		160	15	gG 0 / 160	G 095019	gG 0 / 160 P	G 095226
		200	19	gG 0 / 200	H 095020		
1	500 V	80	8.5	gG 1 / 80	K 095022	gG 1 / 80 P	D 095591
		100	9.6	gG 1 / 100	P 095026	gG 1 / 100 P	E 095592
		125	12.5	gG 1 / 125	T 095030	gG 1 / 125 P	F 095593
		160	15	gG 1 / 160	V 095031	gG 1 / 160 P	G 095594
		200	19	gG 1 / 200	W 095032	gG 1 / 200 P	H 095595
		250	23	gG 1 / 250	Z 095035	gG 1 / 250 P	K 095597

Accessories : Neutral link BS0 Part # G 097710 - BS1 Part # H 097711
Pull-out handle - PMP Part # E 097708


TOTAL CLEARING I^2t

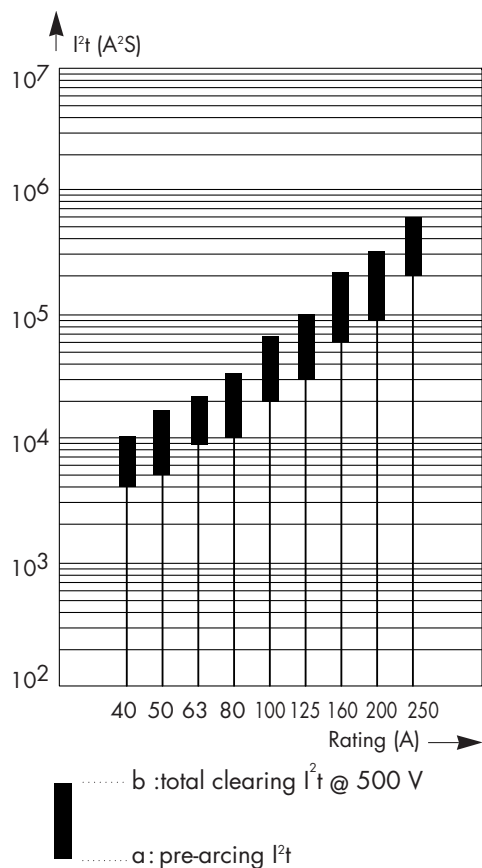

CURRENT LIMITATION CURVES

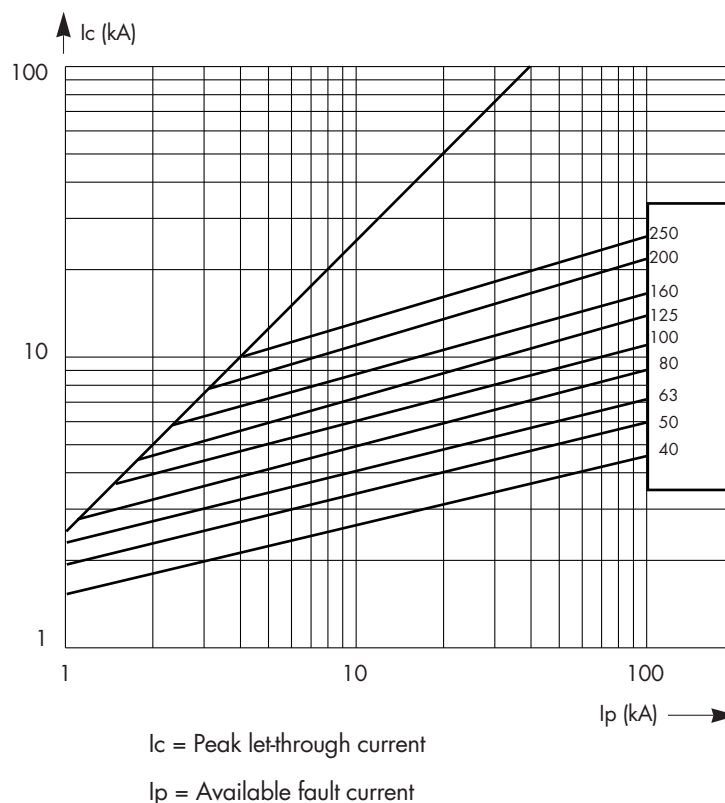

TIME VS. CURRENT CHARACTERISTICS

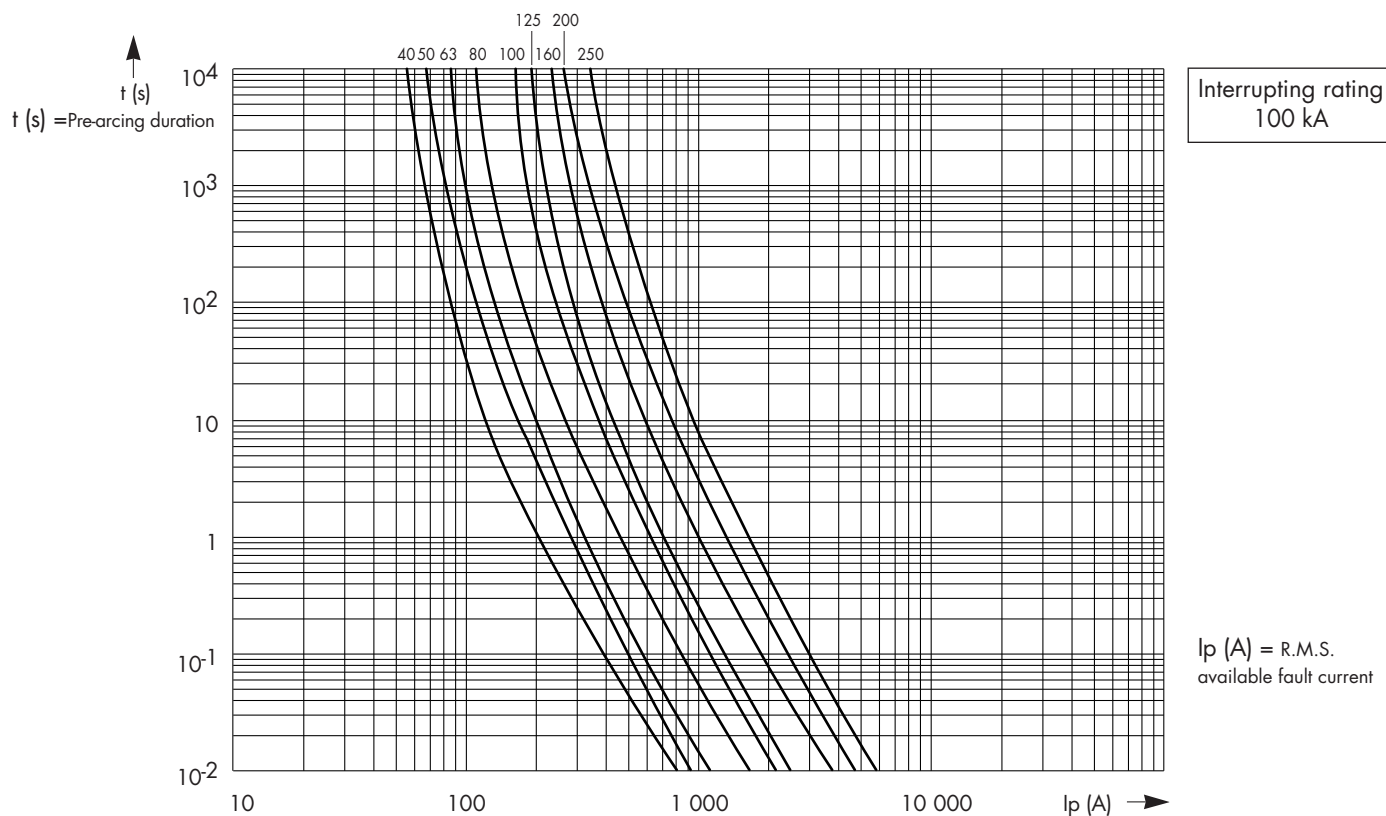

FERRAZ

28, rue Saint Philippe
 B.P. 3025 - 69391 Lyon Cedex 03-France
 Tél. 33 (0)4 72 22 66 11
 Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
 69720 Saint-Bonnet de Mure - France
 Tél. 33 (0)4 72 22 66 11
 Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: R600292-03/97
 CP3B1 / 3B1 34059 GB
 RA 0146 B