



LOW VOLTAGE FUSES





500 V
gG from 125 to 630 A
Sizes : 2 - 3



BLADE STYLE FUSES : WITH BLOWN FUSE INDICATOR OR TRIP-INDICATOR

COMPLYING WITH IEC 269.1 AND 2.1, NF EN 60269.1 & 2 NF C 63210 - 63211 AND DIN 43620

DIMENSIONS



With trip-indicator



With blown fuse indicator



Size	A	B	C	D	D1	D2*	F*	G	H	J	K	L	M	N	e	Wgt.
2	60	64	72	74	50	50	14	3	28	19	14,5	150	10	14,5	6	590g
3	75	61	88	75	70	64	14	2,5	36	23	14,5	150	10	18	6	850g


* For fuses with trip-indicator

MAIN CHARACTERISTICS


Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	With blown fuse indicator		With trip-indicator	
				Code	Part #	Code	Part #
2	500 V	125	12	gG 2 /125	H 095066	gG 2 /125 P	X 095033
		160	15	gG 2 /160	K 095068	gG 2 /160 P	Y 095034
		200	19	gG 2 /200	M 095070	gG 2 /200 P	A 095036
		250	23	gG 2 /250	G 095042	gG 2 /250 P	F 095041
		315	24	gG 2 /315	H 095043	gG 2 /315 P	K 095045
		400	33	gG 2 /400	J 095044	gG 2 /400 P	M 095047
3	500 V	315	24	gG 3 /315	W 095170	gG 3 /315 P	N 095048
		400	33	gG 3 /400	V 095054	gG 3 /400 P	P 095049
		500	36	gG 3 /500	W 095055	gG 3 /500 P	N 095071
		630	45	gG 3 /630	X 095056	gG 3 /630 P	P 095072

Accessories : Neutral link BS2 Part # J 097712 - BS3 Part # K 097713
Pull-out handle - PMP Part # E 097708


TOTAL CLEARING I^2t

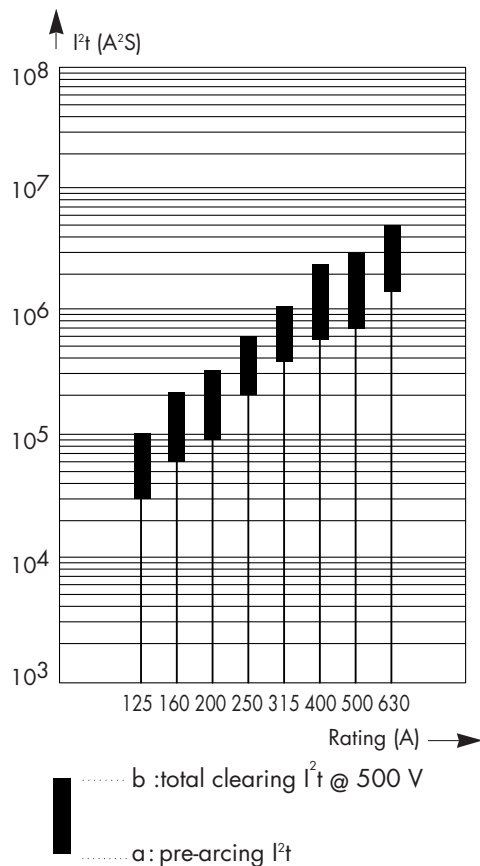

CURRENT LIMITATION CURVES

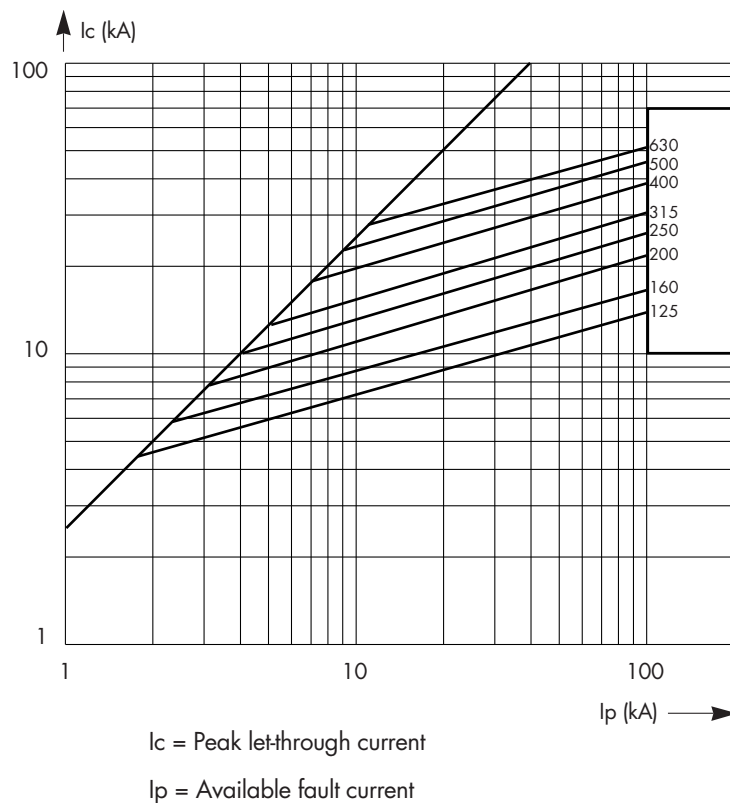

TIME VS. CURRENT CHARACTERISTICS

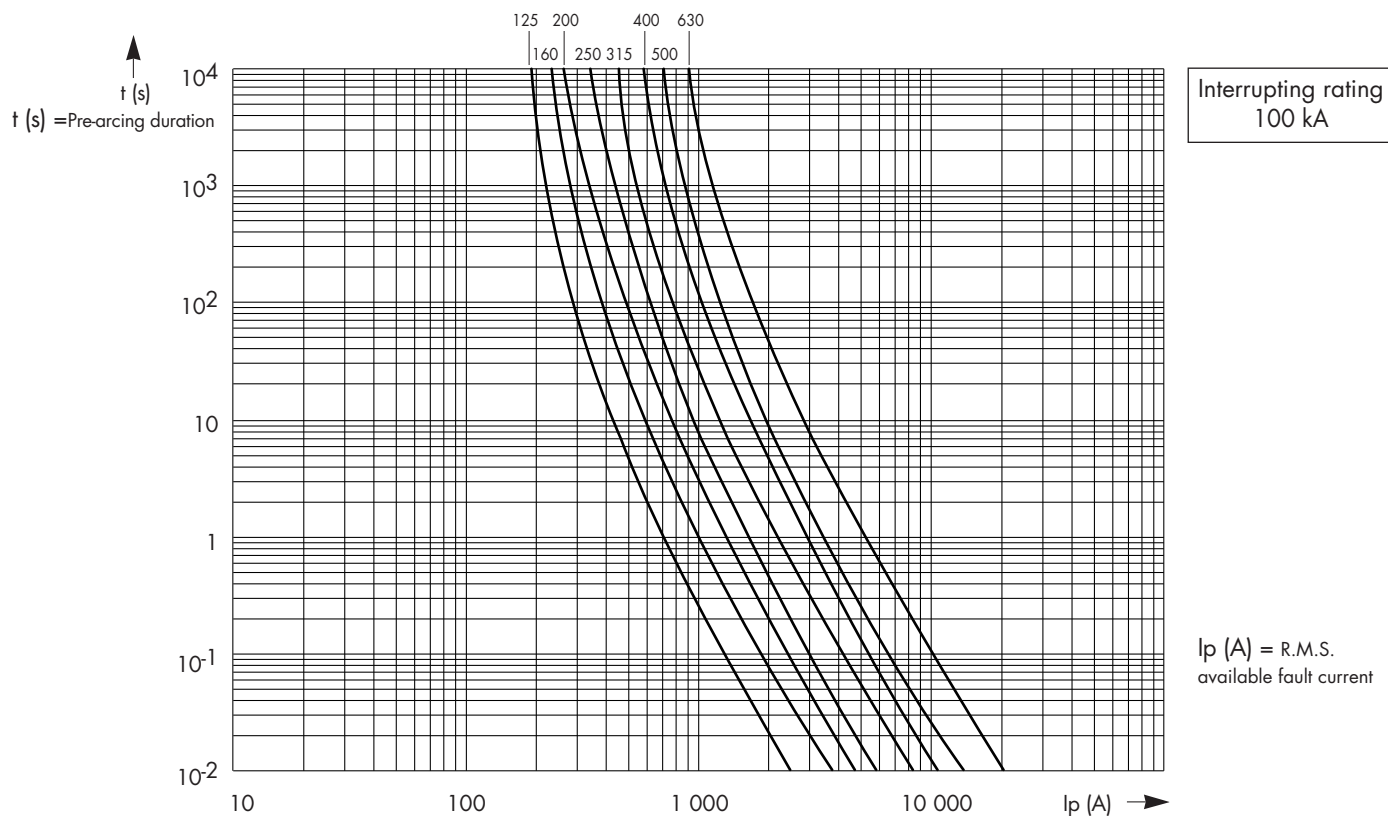

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: **S600293-03/97**
CP3B1 / 3B1 34060 GB
RA 0147 B