



LOW VOLTAGE FUSES





500 V
gG from 630 to 1250 A
Size : 4



BLADE STYLE FUSES : WITH BLOWN FUSE INDICATOR OR TRIP-INDICATOR

COMPLYING WITH IEC 269.1 AND 2.1, NF EN 60269.1 & 2 NF C 63210 - 63211 AND DIN 43620

DIMENSIONS



With trip-indicator



With blown fuse indicator

Size	A	B	C	D	D1	D2*	F*	G	H	J	K	L	M	N	e	Poids
4	107	61	119	78	90	77	14	2,5	60	27	14,5	200	10	23	8	1900g


* For fuses with trip-indicator

MAIN CHARACTERISTICS


Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	With blown fuse indicator		With trip-indicator	
				Code	Part #	Code	Part #
4	500 V	630	45	gG 4 / 630	S 098318	gG 4 / 630 P	G 088510
		800	51	gG 4 / 800	T 098319	gG 4 / 800 P	J 088512
		1000	77	gG 4 / 1000	V 098320	gG 4 / 1000 P	K 088513
		1250	80	gG 4 / 1250	W 098321	gG 4 / 1250 P	L 088514

Accessories : Neutral link - BS4 Part # M 097715
Pull-out handle - PMP Part # E 097708


TOTAL CLEARING I^2t

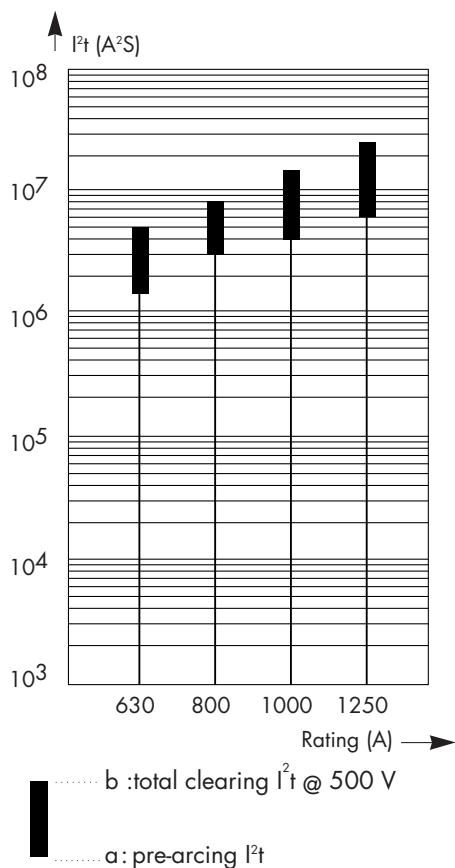

CURRENT LIMITATION CURVES

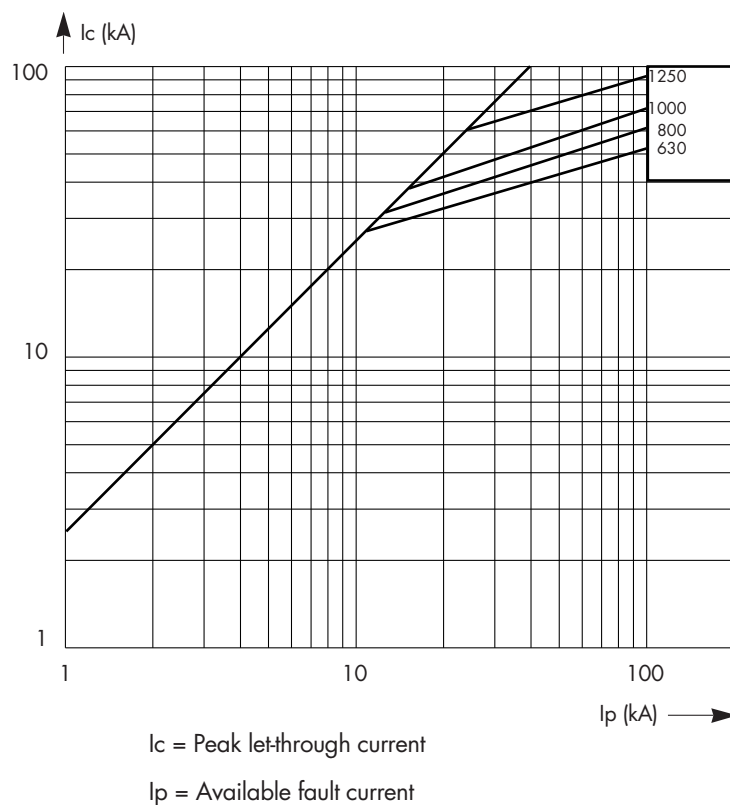

TIME VS. CURRENT CHARACTERISTICS

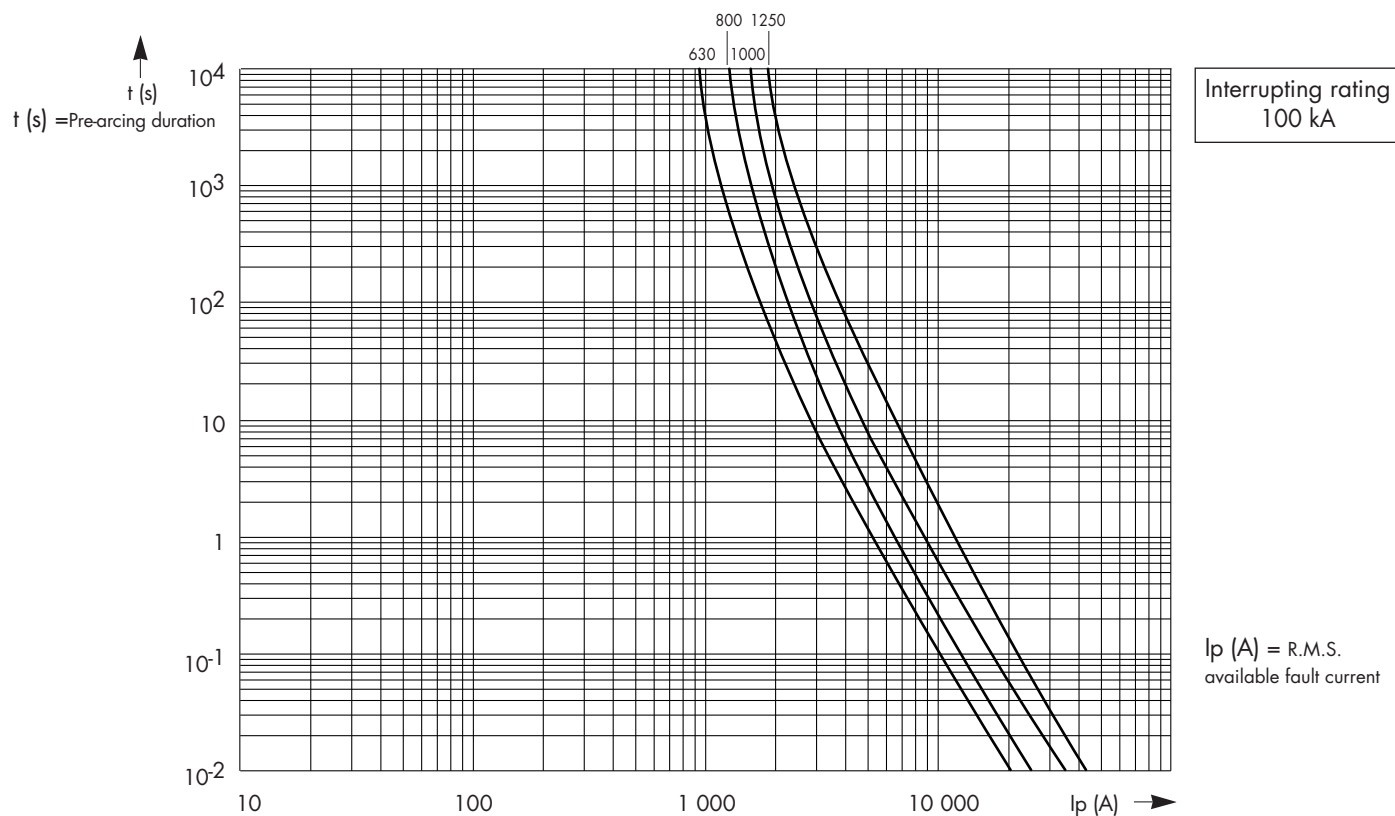

FERRAZ

28, rue Saint Philippe
 B.P. 3025 - 69391 Lyon Cedex 03-France
 Tél. 33 (0)4 72 22 66 11
 Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
 69720 Saint-Bonnet de Mure - France
 Tél. 33 (0)4 72 22 66 11
 Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: T600294-03/97
 CP3B1 / 3B1 34061 GB
 RA 0148 B