



LOW VOLTAGE FUSES




500 V
aM from 16 to 125 A
Size : 00

BLADE STYLE FUSES : WITH BLOWN FUSE INDICATOR

COMPLYING WITH IEC 269.1 AND 2.1 NF EN 60269.1
& 2 NF C 63210 AND DIN 43620 STANDARDS

DIMENSIONS

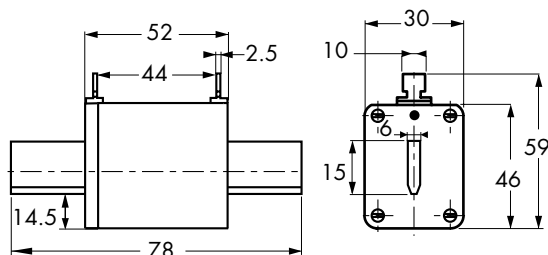

Weight : 150 g




MAIN CHARACTERISTICS


Size	Voltage rating (V)	Current rating I _N (A)	Watts losses	With blown fuse indicator	
				Code	Part #
00	500 V	16	0.8	aM 00 L / 16	F 098307
		20	1.1	aM 00 L / 20	G 098308
		25	1.3	aM 00 L / 25	H 098309
		32	1.8	aM 00 L / 32	J 098310
		35	2.0	aM 00 L / 35	K 098311
		40	2.5	aM 00 L / 40	L 098312
		50	3.0	aM 00 L / 50	M 098313
		63	3.6	aM 00 L / 63	N 098314
		80	5.2	aM 00 L / 80	P 098315
		100	6.0	aM 00 L / 100	Q 098316
		125	7.0	aM 00 L / 125	R 098317

Accessories : Neutral link BS00 - Part # : F 097709
Pull-out handle - PMP - Part # : E 097708


TOTAL CLEARING I^2t

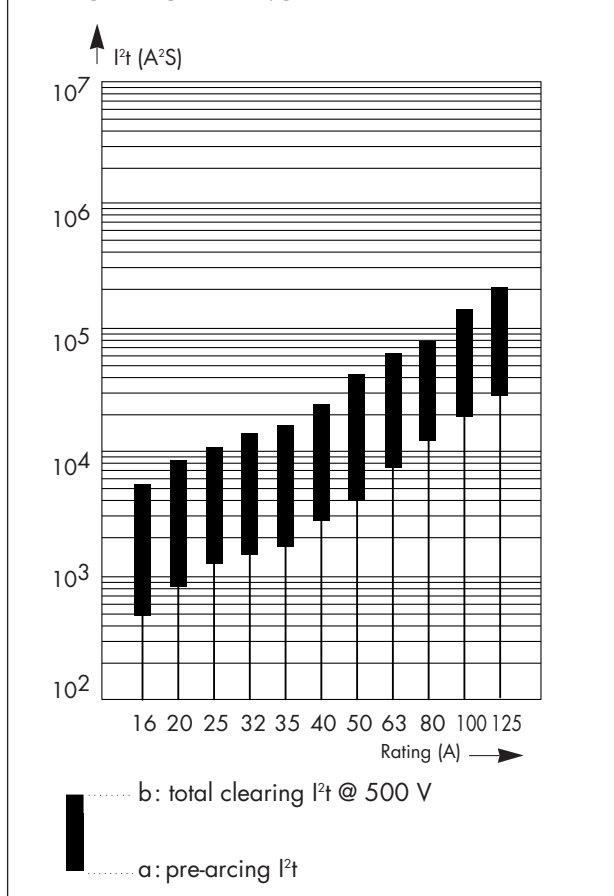

CURRENT LIMITATION CURVES

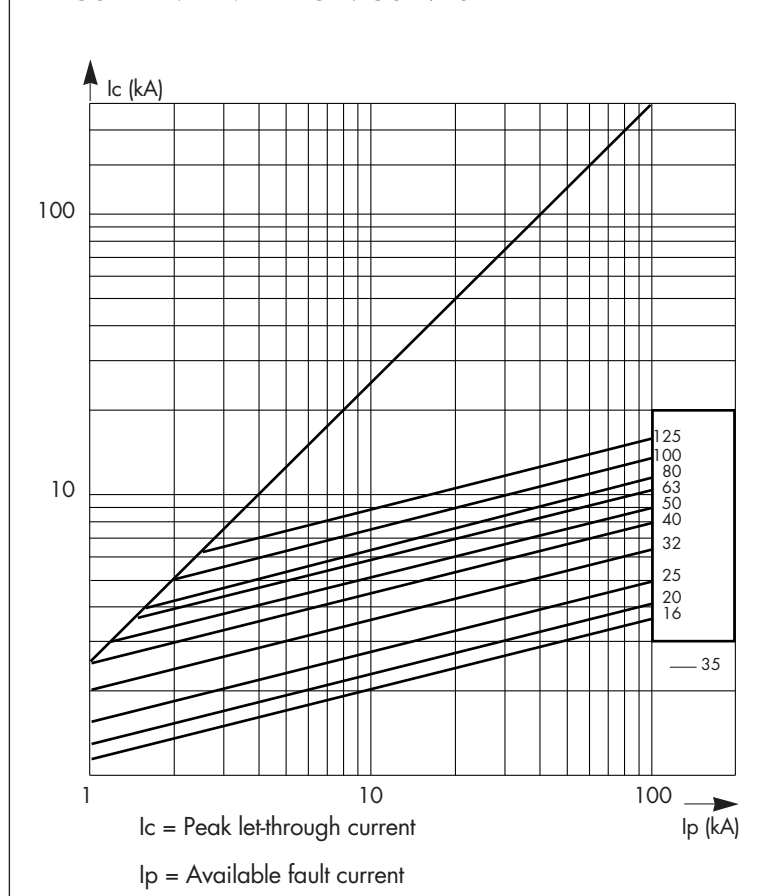

TIME VS. CURRENT CHARACTERISTICS

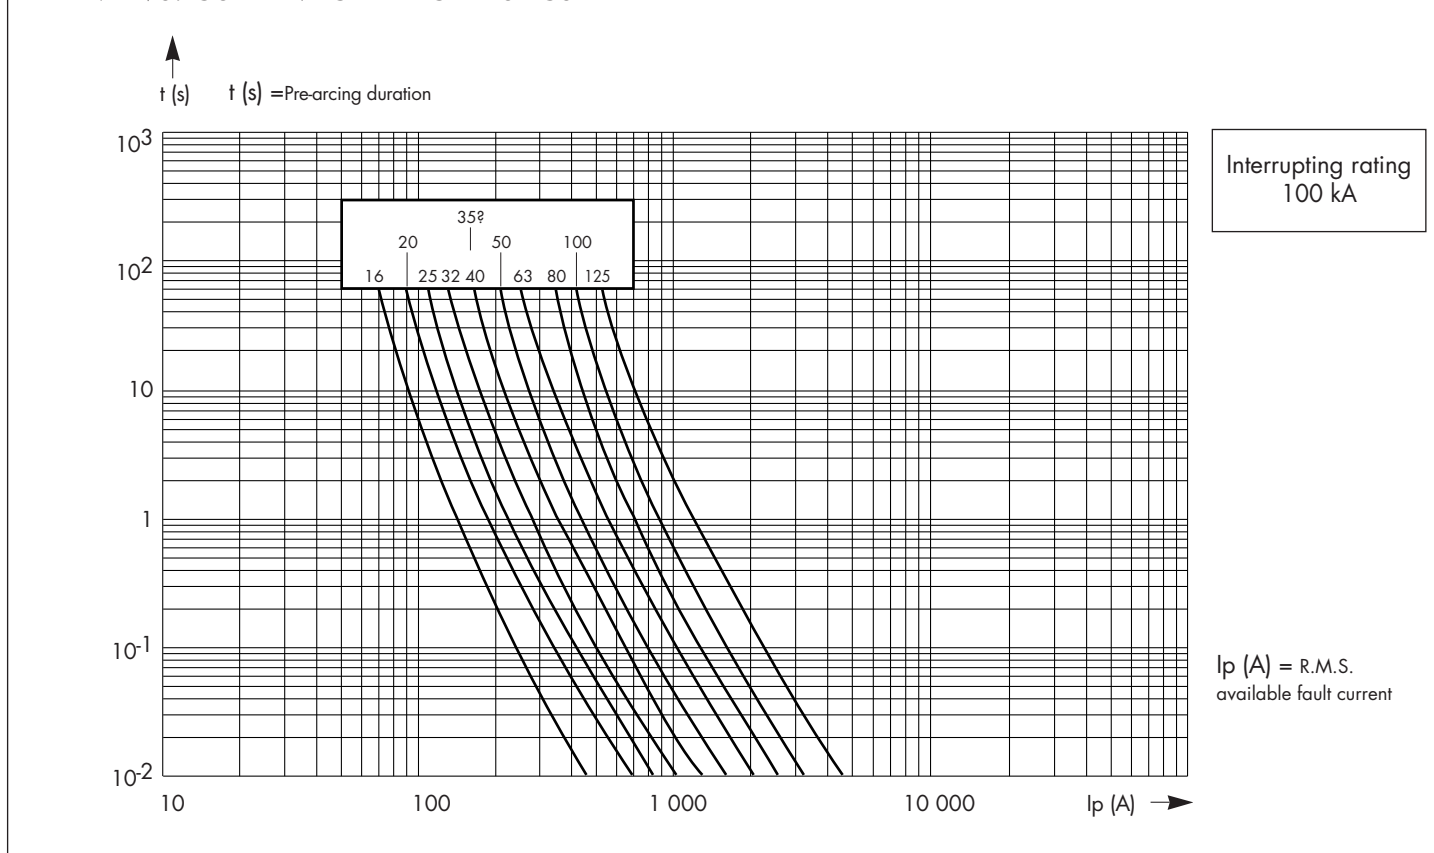

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: X600297-03/97
CP3B1 / 3B1 34062 GB
RA 0149 B