




Configure STA Mode on Tabby WiFi

1. Perform a printer self-test to get the IP address that the equipment has in **AP Mode**

```
Protocols : TCP/IP
MAC address: 00-61-64-FB-08-94
IP address : 192.168.123.100
Subnet Mask: 255.255.255.0
Gate Way : 192.168.123.1
Net DHCP : Disabled

Run mode : AP
[AP Info]
SSID : Printer
Key : Open
AP IP : 10.10.100.254
Module Version : LPT230(2M)
```

2. Access the **Wi-Fi network manager** on a mobile phone or PC and choose the network "Printer"

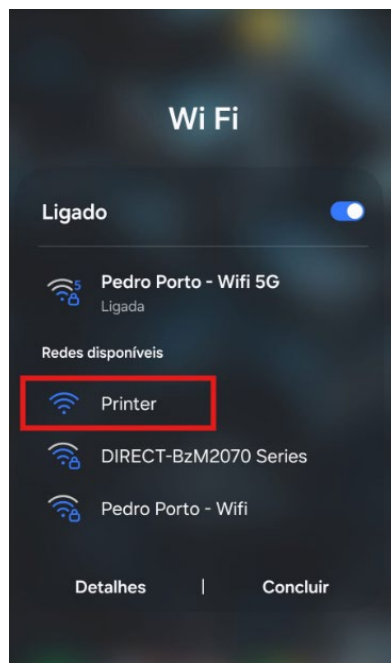


3. Open the browser and enter the IP address that was on the self-test:
10.10.100.254. When prompted for a username and password, enter **admin** for both the username and password

A mobile browser interface showing a login screen. The address bar displays '10.10.100.254'. The main content area has a dark background with the title 'Iniciar sessão'. Below the title, a message states: 'O domínio http://10.10.100.254 requer um nome de utilizador e uma palavra-passe. A sua ligação a este site não é privada.' There are two input fields: 'Nome de utilizador' with the text 'admin' and 'Palavra-passe' with masked characters '.....'. At the bottom, there are two buttons: 'Cancelar' and 'Iniciar sessão'.


4. Select the **STA Setting** option to choose the Wi-Fi network where you want the printer to connect, and press the **Scan** button

A mobile browser interface showing the 'STA Setting' screen. The address bar displays '10.10.100.254/index_en.html'. On the left, a sidebar menu lists various settings: System, Work Mode, STA Setting (highlighted), AP Setting, Other Setting, Account, Upgrade SW, Restart, Restore, webSocket, and Bonjour. The main content area has a blue background. It contains a form with the following fields: 'Network Name (SSID)' with the value 'HF-LPT230-AP' and a 'Scan' button highlighted with a yellow box; 'Encryption Method' set to 'Disable'; 'Obtain an IP address automatically' set to 'Enable'; 'IP Address' set to '0.0.0.0'; 'Subnet Mask' set to '0.0.0.0'; and 'Gateway Address' set to '0.0.0.0'. A 'Save' button is at the bottom right. At the bottom of the screen, it says 'Web Ver:1.0.15'.

5. After the search, we must select the desired network and press **OK**

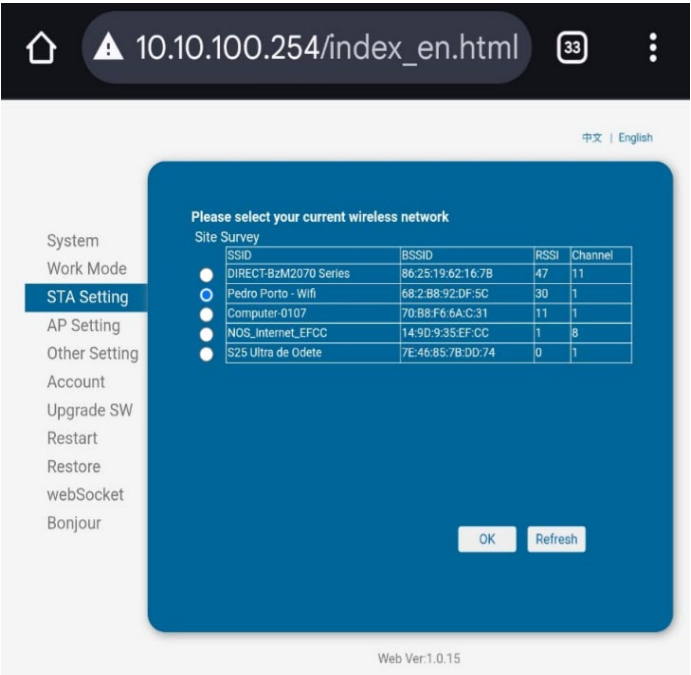

6. We will receive an alert, and we press **OK**

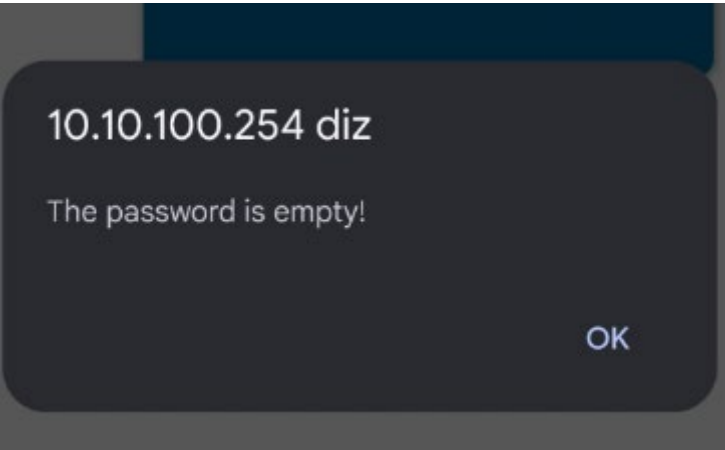

7. Here, enter the **Password** (1), change the **Automatic IP Assignment** to **Disable** (2), and configure the desired **IP, Subnet Mask, and Gateway** (3, 4, 5), then press **Save**

System
Work Mode
STA Setting
AP Setting
Other Setting
Account
Upgrade SW
Restart
Restore
WebSocket
Bonjour

Network Name (SSID) Pedro Porto - Wifi Scan
Note: case sensitive
Encryption Method WPA2PSK
Encryption Algorithm AES
Password *****
Show passwords
Obtain an IP address automatically Disable
IP Address 192.168.1.66
Subnet Mask 255.255.255.0
Gateway Address 192.168.1.1
Save

Web Ver:1.0.15

8. Finally, access **Work Mode** and change from **AP Mode** to **STA Mode**, then press **SAVE**

System
Work Mode
STA Setting
AP Setting
Other Setting
Account
Upgrade SW
Restart
Restore
WebSocket
Bonjour

Select Mode
AP+STA mode
AP mode
STA mode

