



LOW VOLTAGE FUSES



FOR BLADE STYLE FUSES ACCESSORIES

APPLICATION

The 5SI Z fuse holders are designed for the mounting of high interrupting rating blade style fuses, without trip indicator and microswitch.



DESIGN

- One-pole assembly.
- Single piece contact and connecting end (made of silver plated copper).
- The contact force is achieved with an add-on spring.
- Resistance to standard weather conditions.
- Porcelain base.

COMPLIANT WITH IEC 269/1-2 AND DIN 43620 FUSE HOLDERS



FUSE HOLDERS

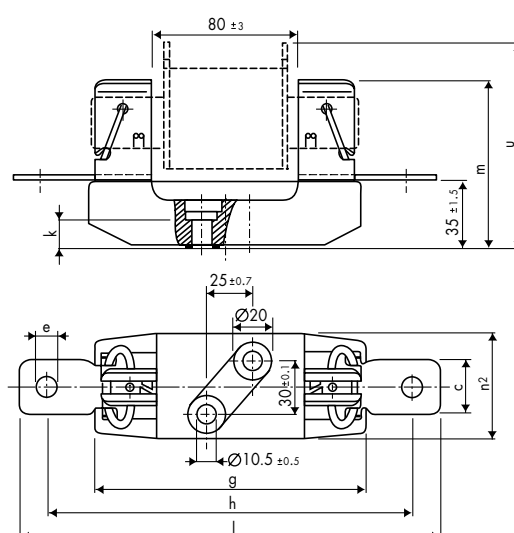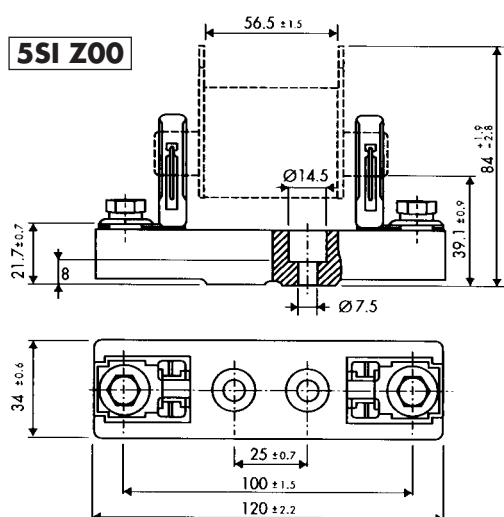

Tailles	1	2	3
k	15	15	15
m ±3	76	88	95
u +2 -4	99	112	122
g ±3	149	157	155.5
h ±1.5	175	200	210
l	200	228	248
e	Ø11	Ø11	Ø11
c	30	30	40
n2 ±1.5	58	58	65

Designation	Fuse size	Part#	Maximum current rating (A)	Maximum power (W)	Max. peak current acceptable (kA)	Connection	Weight (kg)	Packaging (pcs)
5SI Z00	00	G 205580	160	12	24	M 8	0,25	5
5SI Z1	1	H 205581	250	32	37	M10	0,58	5
5SI Z2	2	J 205582	400	45	48	M10	0,73	5
5SI Z3	3	K 205583	630	60	75	M10	0,90	5

PULL-OUT HANDLE

APPLICATION

The pull-out handle is used when removing the fuse with voltage is necessary (no current): fuse insulator function only.


DESIGN

Proof against tropical climate conditions.

INSULATION VOLTAGE

660 V

Designation	Sizes	Part#	Weight (kg)	Packaging
DP	00-3	H 207375	0.21	5

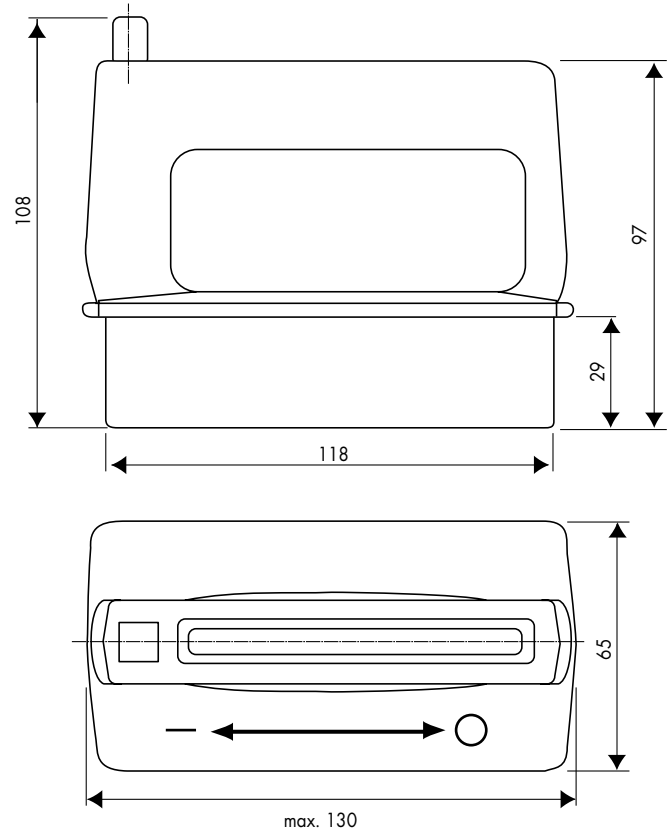


NEUTRAL LINKS

APPLICATION


The neutral links are used when making an easily disconnection is necessary or when replacing a fuse is needed. For any removal the pull-out handle has to be used.

DESIGN

The conductive part is nickel-plated copper made. Proof against tropical climate conditions.

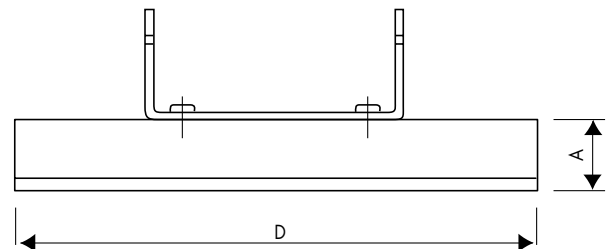

Designation	Size	Current rating (A)	Part#	Weight (kg)	Packaging
ZP 00	00	160	D 207371	0.09	3
ZP 1	1	250	E 207372	0.17	3
ZP 2	2	400	F 207373	0.23	3
ZP 3	3	630	G 207374	0.29	3



Dimensions (mm)

Type	A	B	C	D
ZP 00	16	35	45	78.5
ZP 1	20	40	50	135
ZP 2	25	48	58	150
ZP 3	32	60	70	150

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

N° Identification CEE : FR 429 555 11 217

Publication: **D600326-03/96**
CP3B1 / 3B1 **34102GB**
RA 0113 A

in whole or in part, made without FERRAZ written consent, is forbidden according to the laws of France and particularly the law no. 92-597 of July 1st 1992 relating to the copy-right.

serve the right to modify, at any time, the characteristics and specifications contained in this document. FERRAZ refuses all and any responsibility concerning their use whatever the purpose or the application. Any copy, reproduction or information herein contained, without the express written consent of FERRAZ, is strictly prohibited.

The specifications or data herein contained are only given for indication, without any undertaking whatsoever. Their publication does not suggest that the matter is free of any rights whatsoever. Furthermore, due to constant evolution of techniques and norms, we reserve the right to modify, at any time, the characteristics and specifications contained in this document.