




SERIES A015R, F 150 VAC-1 TO 4000 AMPS



Part Number	Current Rating (A)	i^2t at 150VAC (A ² s)	Watt Losses at Rated Current (W)
A015F001	1	0.1425	0.68
A015F002	2	0.76	1.3
A015F003	3	2.47	1.7
A015F004	4	5.8	2.1
A015F005	5	10	2.8
A015F006	6	17.1	3.1
A015F007	7	8.5	2.2
A015F008	8	11.4	2.5
A015F010	10	15.2	2.6
A015F012	12	22.8	3.0
A015F015	15	32.3	3.0
A015F020	20	57	4.0
A015F025	25	104.5	5.2
A015F030	30	190	5.6
A015F035	35	199.5	9.0
A015F040	40	266	10
A015F045	45	323	12
A015F050	50	446.5	13
A015F060	60	769.5	14
A015R070	70	855	7.8
A015R080	80	1.23×10^3	8.7
A015R090	90	1.5×10^3	9.7
A015R100	100	1.9×10^3	11
A015R125	125	3.4×10^3	12
A015R150	150	4.6×10^3	15
A015R175	175	6.7×10^3	17
A015R200	200	9.3×10^3	19
A015R225	225	13.3×10^3	20
A015R250	250	15.7×10^3	23
A015R300	300	26.3×10^3	27
A015R350	350	36.1×10^3	31
A015R400	400	49.7×10^3	35
A015R500	500	47.5×10^3	55
A015R600	600	71.2×10^3	64
A015R700	700	112×10^3	74
A015R800	800	146×10^3	80
A015R900	900	228×10^3	81
A015R1000	1000	266×10^3	92
A015R1200	1200	447×10^3	110
A015R1500	1500	829×10^3	130
A015R1600	1600	1.0×10^6	130
A015R1800	1800	1.2×10^6	151
A015R2000	2000	1.5×10^6	165
A015R2500	2500	2.7×10^6	199
A015R3000	3000	3.9×10^6	236
A015R4000	4000	7.5×10^6	299


NOTE: UL Recognized from 1 to 1000 Amperes.

Time/Current Characteristics

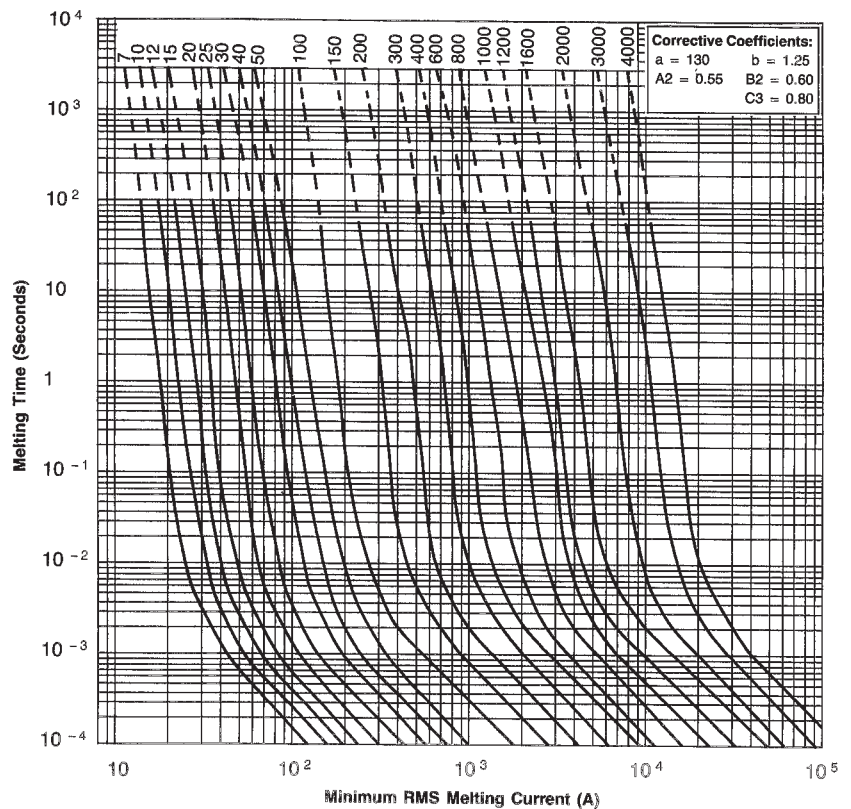


NOTE: Fuse must not be selected to interrupt in dotted line area.


Arc Voltage

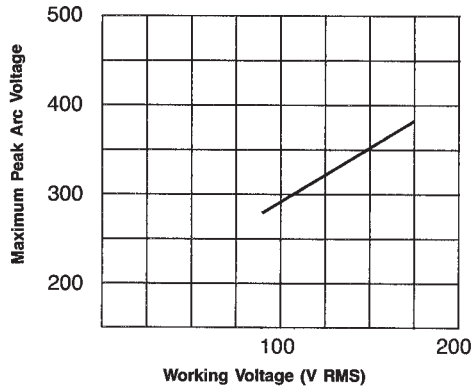



Maximum Peak Let-Through Current

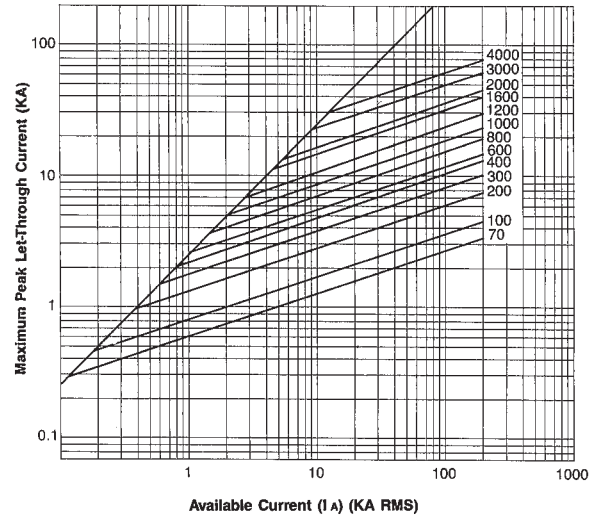

DC Voltage Derating

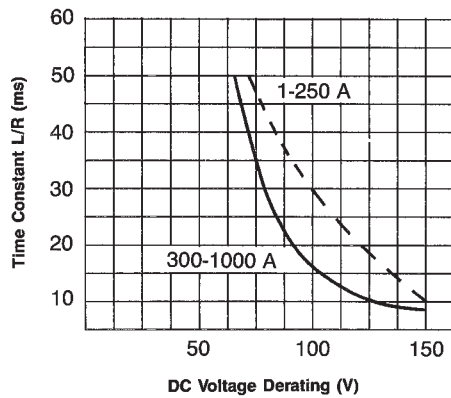

Clearing I²t vs. Operating Voltage

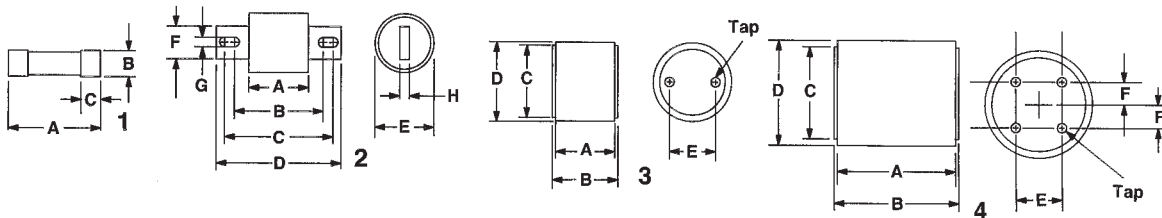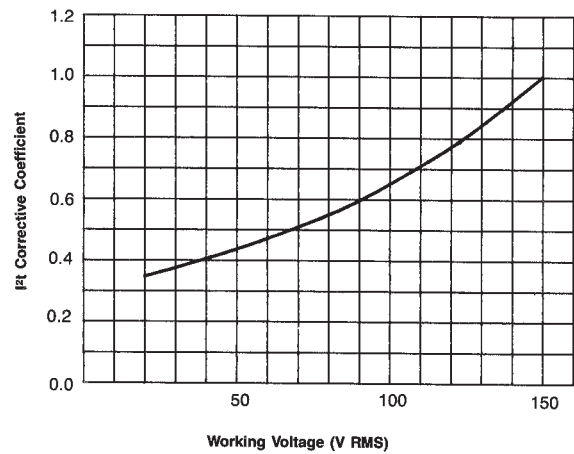

150 VOLT FUSE DIMENSIONS

PART NUMBER	FIG.	A	B	C	D	E	F	G	H	TAP
A015F001 to 030	1	1 1/2	13/32	3/8						
A015F035 to 060	1	2	13/16	1/2						
A015R070 to 400	2	1 5/32	1 7/8	2 5/32	2 21/32	1	3/4	5/16	3/16	
A015R500 to 1000	2	1 1/4	2 1/16	2 9/16	3 1/2	1 1/2	1	13/32	1/4	
A015R1200 to 2000	3	1 5/8	1 7/8	1 3/4	2	1				*
A015R2500 to 3000	3	1 5/8	1 7/8	2 1/2	3	1 1/2				**
A015R4000	4	1 5/8	1 7/8	3	3 1/2	1 1/2	3/4			**

TAP SPECIFICATIONS * 3/16-24 1/2" Deep ** 1/2-20 1/2" Deep

FERRAZ

28, rue Saint Philippe
B.P. 3025 - 69391 Lyon Cedex 03-France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 67 13

Rue de Vaucanson
69720 Saint-Bonnet de Mure - France
Tél. 33 (0)4 72 22 66 11
Fax. 33 (0)4 72 22 66 12

Publication : R600476-03/94
RA 0318 A